



FENIX
LIGHTING FOR EXTREMES

FENIXLIGHT

www.voltronic.de

FENIX

PRODUCT CATALOG

BRAND OVERVIEW

Fenix > Founded in 2001, Fenix has developed into a leading Chinese national high-tech enterprise, specializing in the R&D, manufacturing, sales, and marketing of mobile lighting products including flashlights, tactical lights, headlamps, bicycle lights, lanterns, and lighting accessories. Our products are widely used in a variety of use cases, including EDC (everyday carry), hiking, caving, riding, hunting, search and rescue, military and police patrols, security, and industrial works. Since Fenix was founded, we have received acclaim and recognition from users across the globe for our excellent product and customer service, and we are committed to becoming the world's leading mobile lighting brand.

FENIX

2001

Establishment

120+

Countries and regions

10M+

Consumer users



BRAND HONOR



WORLDWIDE SALES NETWORK

2005-2008

Fenix products entered the United States, Germany, Netherlands, Finland, Switzerland, Canada, Thailand, Denmark, Britain, Italy, France, Hong Kong, South Korea, Russia, Japan, Taiwan, Singapore, Malaysia, South Africa, Australia, etc.

2009-2013

Fenix products continued to expand the map, entering Saudi Arabia, Indonesia, Sweden, Norway, India, Czech Republic, Israel, UAE, Poland, Vietnam, Kazakhstan, Brazil, Spain and other markets.

SINCE 2014

Fenix products have been in more than 100 countries and regions around the world, and the sales network has achieved a global layout.



Fenix products are now being sold in many mainstream sales channels in domestic and overseas.

- REI - The world's largest outdoor chain channel.
- Grainger - The largest industrial chain channel in the United States.
- Dick's Sporting Goods - The largest outdoor chain channel in the United States.
- Sportsman's Warehouse - Outdoor sporting goods retailer.
- Galls - Leading chain store of public safety equipment and uniforms.
- Frankonia - The largest hunting chain channel.
- MediaMarkt - The largest multinational chain of stores selling consumer electronics.
- MEC - Canada's largest outdoor chain channel.
- Bever - The largest outdoor chain channel in the Netherlands.
- Tiexuejunpinxing - China's most well-known military product chain store.
- Sanfu Outdoor - the largest outdoor chain channel.
- Firefox Outdoor, Zhongjiahe Outdoor, etc.
- PROTrek - The largest outdoor chain channel in Hong Kong, China.



LIGHTING FOR EXTREMES

Harsh environment tests

Fenix ➤ products are tested in accordance with international ANSI standards. All products withstand more than 30 rigorous tests including high-strength water immersion, dust proofing, impact resistance, high and low temperature, etc. All these ensure that Fenix products can pass the tests of various conditions or harsh environments and provide users with secure and reliable lighting.

➤ Drop test / High and low-temperature test / IPX8 waterproof test / Switch press test



Drop test



High and low-temperature test



IPX8 waterproof test



Switch press test

In order to verify the performance of the product after a drop, 3-5 samples will be randomly selected to perform a 1.5-meter drop test on 6 sides*. After 6 drops, the product still needs to pass a waterproof test to ensure that the function of the tested product is not in any way hindered, and it must have no cracks or damage.

*The drop height for a flashlight is 1.5 meters, and for a headlamp 2 meters.

In order to verify the high and low-temperature resistance of the product structure, 5 samples will be randomly selected and placed in a humidity cabinet for half an hour at -35°C, then it will be quickly transferred to an oven for half an hour at 70°C. This operation will be repeated 5 times. No damage to or deformation of the appearance and structure of the product must be visible for it to pass the test.

In order to verify the waterproof performance of a product, 10 samples will be randomly selected and subjected to a drop test after being immersed in 2 meters of water for 30 minutes. After the test, the product is continuously immersed in 2 meters of water for 4 hours. Before and after the test the product must function normally and no water seepage must be evident for it to pass the waterproof test.

In order to verify the service life of product switches, 3 samples will be randomly selected of which the switches will be clicked a total of 10,000 times. After the test, the product must function normally, with good hand feeling and sensitivity, and a normal clicking of 2 times per second qualifies it to pass this test.

LIGHTING FOR EXTREMES

The Ultimate Pursuit Of Technological Innovation

Fenix > always pursues advanced industry technology and constantly creates innovative lighting products. So far, we have 140+ technology patents that are widely used in various lighting products, from a mini keychain flashlight to a sturdy headlamp, which can all confirm Fenix's firm footsteps in exploration and innovation.

01 > INNOVATIVE APF TECHNOLOGY SYSTEM

Fenix's innovatively developed APF Technology System* uses a single layer to achieve simultaneous transmission of working current and signals control, completely breaking the shackles of the tactical flashlight by the tail switch, while still achieving the tactical requirements and applications for flashlights, such as small size, high brightness, and anti-interference.

Utility Model Patent: ZL 201920500579.6

Brightness bottleneck breakthrough

The brightness is no longer limited by the current withstand capability of the tactical switch, easily reaching or even exceeding 3000 lumens, giving full play to the advantages of LEDs.

Smaller light size and more battery compatibility

The single-layer body and single-polarity battery are used to complete current transmission and signal control, making smaller light sizes and more battery use possibilities.

Anti-interference

Complex external environments such as strong magnetic fields are easily dealt with through stronger anti-interference ability, so the flashlight can be used with confidence.

Multifunctional combination

Through the pulse-frequency transmission system, it makes the multi-switch and multi-function combination of tactical operation and output selection can be achieved.

* The APF (Advanced Pulse-frequency Transmission System) was developed by Fenix Laboratory to produce better flashlights. This has allowed the abandonment of traditional development by breaking through the technology bottleneck, allowing the flashlight with a tail switch to achieve a higher level of performance.

02

>

TWO-WAY SPORT HEADBAND
FIT SYSTEM

Headlamps are essential outdoor gear. In addition to brightness, runtime, and waterproofness, simple and quick adjustment of the headband is also a primary concern for most users. The traditional headband uses a buckle to adjust the length, and it is extremely inconvenient to use as both hands are needed to adjust the headband.

Fenix has now broken the limitation of conventional headband adjustment by applying the two-way SPORT Fit System to the headband adjustment, which has been the perfect solution to this problem. The two-way SPORT Headband Fit System is fitted with a dial structure. The length of the headband can be adjusted by rotating the dial, which provides convenient and flexible adjustment of the headband with a single hand while on the run.

Utility Model Patent:

ZL 202321621763.9

One-handed adjustment while running

During trail running, the headband will inevitably loosen and fall due to bumpy and changing road conditions, resulting in changes in lighting angles, so the original intention of the single-handed design is to effectively ensure the runners' stride and safety, thus making sure every second counts and every step comforts.

Just rotate

Rotate the dial clockwise to tighten the headband, and rotate the dial anticlockwise to loosen the headband. When the headband hits its maximum length, keep rotating the dial and the operation direction will reverse.



01.Rotate the dial clockwise to tighten the headband



02.Rotate the dial anticlockwise to loosen the headband



03

>

IOP - INTELLIGENT OVERHEAT
PROTECTION

LED flashlights mostly use high-power LED light-emitting bodies with batteries. In order to meet lighting needs, they often use high-power constant circuit output to supply power. However, due to the small size of the flashlight, long-term high-power lighting will cause the flashlight to become very hot, resulting in the risk of burns.

To overcome this problem, Fenix has created the IOP (Intelligent Overheat Protection). This system applies an integrated circuit system that limits the maximum current input and controls the real-time temperature, which allows the flashlight to automatically reduce its power when the temperature is too high, and to achieve intelligent cooling, thereby protecting the user, reducing safety risks, and relatively extending the runtime for longer lighting*.

Utility Model Patent:

ZL 201821879647.6

Not burning if less than 60°

When the surface of the flashlight reaches the warning temperature before 60°, the IOP will be activated to ensure that the surface of the flashlight will not exceed 60°, and there will be no obvious feeling of hotness.

Sensitive and self-control

Without intervention, after the surface temperature of the flashlight decreases, the power and brightness will be automatically restored.



*Longer lighting means that when the power is automatically reduced under high-temperature conditions, the power consumption is reduced, so the lighting time is relatively increased.

04 > UOL - ULTRA-THIN OPTICAL LENS

Fenix's first 3.5mm UOL (Ultra-thin Optical Lens), adds an aluminum-silicon reflective coating to the unique lens structure, to accomplish the reflection and double refraction of the light emitted by the light source. This design makes a slimmer lens possible.

In addition, compared with the conventional 10mm lens, the UOL can produce better light efficiency and successfully reduce the volume and weight of the flashlight, while making the flashlight more portable and convenient to use.

Utility Model Patent: ZL 201820183805.8

Farther  farther **86%**

With the same thickness, the ultra-thin optical lens has an 86% increase in beam distance when compared with conventional lenses.

Thinner  thinner **60%**

With the same beam distance, the thickness of the ultra-thin optical lens is about 60% thinner than the conventional lenses.





EDC

FENIX EDC (EVERYDAY CARRY) SERIES products are deeply loved by thousands of users for the compact size, stylish appearance, applicable brightness, and practical functionality. In addition, the excellent resistance to water and impact makes the EDC light an indispensable helper in everyone's daily lighting.

Recommend:



Flashlight — E Series



OUTDOOR

FENIX OUTDOOR SERIES are professional lighting tools specialized for a variety of outdoor environments. Its ingenious design, excellent performance and high reliability in both water and drop tests mean that you won't have to worry when using our lights, as you can trust Fenix to safely light your way through the darkness.

Recommend:



Flashlight — LD Series / PD Series
Headlamp — HL Series / HM Series
Bicycle Light — BC Series
Camping Lantern — CL Series



LAW ENFORCEMENT

FENIX TACTICAL SERIES upholds the design concept of toughness, reliability and professionalism. This series enters with high performance and extended reach. Fenix tactical products are widely used and recognized by major national departments such as the Switzerland Military Department, the Netherlands Police, the Saudi Arabia Border Defense, and the Queensland Police of Australia, etc.

Recommend:



Flashlight — PD Series / TK Series
Tactical Light — GL Series




INDUSTRIAL

FENIX INDUSTRIAL LIGHTING PRODUCTS are mobile lighting tools specially designed for industrial applications. Simple operation plus reliable performance have kinds of tasks handled quickly and efficiently. Fenix industrial products are now widely used and recognized by not only ordinary workers but also professional institutes such as petroleum companies and fire departments.

Recommend



Flashlight — WF Series / WT Series
Headlamp — HM Series / HP Series / WH Series

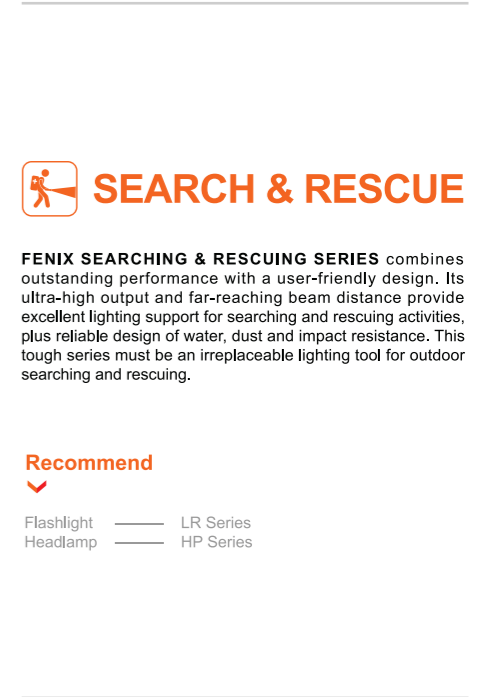


SEARCH & RESCUE

FENIX SEARCHING & RESCUING SERIES combines outstanding performance with a user-friendly design. Its ultra-high output and far-reaching beam distance provide excellent lighting support for searching and rescuing activities, plus reliable design of water, dust and impact resistance. This tough series must be an irreplaceable lighting tool for outdoor searching and rescuing.

Recommend



Flashlight — LR Series
Headlamp — HP Series

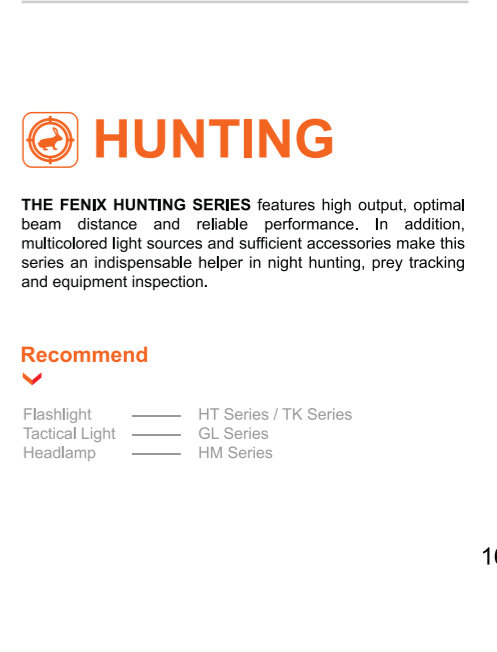

HUNTING

THE FENIX HUNTING SERIES features high output, optimal beam distance and reliable performance. In addition, multicolored light sources and sufficient accessories make this series an indispensable helper in night hunting, prey tracking and equipment inspection.











Recommend



Flashlight — HT Series / TK Series
Tactical Light — GL Series
Headlamp — HM Series

INDEX

01 FLASHLIGHTS

E Series (EDC Flashlights)		- - - - -	20
LD Series (Professional Outdoor Flashlights)		- - - - -	26
PD Series (Portable Law Enforcement Flashlight)	 	- - - - -	29
TK Series (Tough And Powerful Flashlights)	 	- - - - -	37
HT Series (Hunting Flashlights)		- - - - -	42
LR Series (Searching Flashlights)		- - - - -	45
WF Series (Industrial Flashlights)		- - - - -	49
WT Series (Multifunctional Work Lights)		- - - - -	53

02 HEADLAMPS

HL Series (Lightweight Outdoor Headlamps)		- - - - -	56
HM Series (All-metal High-performance Integrated Headlamps)	 	- - -	59
HP Series (High-performance Separated Headlamps)	 	- - -	66
WH Series (High-performance Industrial Headlamps)		- - - - -	69

03 TACTICAL LIGHTS

GL Series (Professional Tactical Lights)	 	- - - - -	70
---	---	-----------	----

04 BICYCLE LIGHTS

BC Series (High-performance Integrated Bicycle Lights)		- - - - -	74
---	---	-----------	----

05 CAMPING LANTERNS

CL Series (High-performance Camping Lanterns)		- - - - -	78
--	---	-----------	----

06 ACCESSORIES

ACCESSORIES	- - - - -	82
ACCESSORIES COMPATIBILITY GUIDE	- - - - -	93
FENIX PRODUCTS SPECIFICATION CHART	- - - - -	97
CUSTOMER SERVICE	- - - - -	103

*There may be some differences between the upcoming product and its finally listed version.

FLASHLIGHTS

E / LD / PD / TK / HT / LR / WF / WT

Fenix flashlights ➤ are specifically designed for all kinds of harsh environments. All flashlight products fully embody toughness, reliability, and user-friendliness. Fenix makes a flashlight that can fit any need, whether it is tactical law enforcement, industrial operations, searching and rescuing or outdoor hiking. Excellent ability to withstand harsh conditions, easy to use, and comfortable grip, all of which make Fenix flashlights stand out from our competitors.

E SERIES



E01 V2.0



E03R V2.0



E05R



E09R



E12 V2.0



E18R V2.0



E20 V2.0



E28R V2.0



E35R



E-CP



E-STAR

E01 V2.0

Mini Keychain Flashlight

- ✦ Ultra-compact size for everyday carry.
- ✦ One-handed operation with the rotating switch.
- ✦ All-metal CNC machining light body.
- ✦ Two colors for option.

Black Blue



100LM

35M

25H

IP68

1XAAA

Size: 2.62" x 0.59" x 0.55" / 66.5 x 15 x 14 mm.
Weight: 0.46 oz / 13 g (excluding battery).
Product ID: E01.11117, E01.13117

E05R

Rechargeable Mini Keychain Flashlight

- ✦ Mini size for perfect everyday carry.
- ✦ Instant Burst.
- ✦ Hidden micro USB charging port.
- ✦ All-metal CNC precision processing.

Green Black Brown



400LM

64M

30H

IP68

320mAh

Size: 2.68" x 0.60" x 0.59" / 68 x 15.3 x 15 mm.
Weight: 0.85 oz / 24 g (including battery).
Product ID: E05R.11111, E05R.17111, E05R.14111

E09R

Rechargeable Mini High-output Flashlight

- ✦ Max 600 lumens output and 124 meters beam distance.
- ✦ Hidden USB Type-C charging port.
- ✦ All-metal CNC precision processing.
- ✦ Ultra-compact size for convenient carrying every day.



600LM

124M

70H

IP68

800mAh

Size: 3.11" x 0.76" x 0.72" / 79 x 19.3 x 18.4 mm.
Weight: 1.59 oz / 45 g (including battery).
Product ID: E05R.11111, E05R.17111, E05R.14111

E03R V2.0

All-metal Keychain Flashlight

Grey Blue Rose Nebula

500LM

90M

30H

IP66

400mAh



Compact design for everyday carry.

USB Type-C rechargeable.

Red warning light.

Breathing indicator with variable color.

	High	Med	Low	Eco	Red	Red Flash	Breathing Light
OUTPUT	500 lumens	150 lumens	30 lumens	5 lumens	5 lumens	5 lumens	1 lumen
RUNTIME	1 hour 20 minutes	2 hours	6 hours 35 minutes	30 hours	/	/	/

Size: 2.07" x 1.02" x 0.51" / 52.5 x 26 x 13 mm. Weight: 1.06 oz / 30 g (including battery). Product ID: E03R.13112, E03R.12111, E03R.16112, E03R.23112

E12 V2.0

Portable EDC Flashlight

- ✦ Automobile ultra-thin optical lens coating process.
- ✦ No standby current, safe and cost-efficient.
- ✦ One-handed operation with the single tail switch.
- ✦ Two-position body clip and tail standing capability for varying conditions.



Size: 3.06" x 0.75" x 0.69" / 77.6 x 19 x 17.6 mm.
Weight: 0.96 oz / 27.3 g (excluding battery).
Product ID: E12.11116

E20 V2.0

Portable outdoor EDC Flashlight

- ✦ Max 350 lumens output and 126 meters beam distance.
- ✦ One-handed operation with the tail switch.
- ✦ Digitally regulated circuit for maintaining a stable output.
- ✦ Intelligent overheat protection and reverse polarity protection.



Size: 5.00" x 0.83" x 0.66" / 127 x 21 x 16.8 mm.
Weight: 1.48 oz / 42 g (excluding battery).
Product ID: E20.11114

Utility Model patent: ZL 201820183805.8

E18R V2.0

Ultra-compact High-performance EDC Flashlight

- ✦ Max 1200 lumens output.
- ✦ USB Type-C fast charging.
- ✦ Magnetic tail - eliminates hand fatigue.
- ✦ Electronic lockout + physical lockout.
- ✦ Two-position body clip for convenient carry.



HOT




Size: 2.64" x 0.87" x 0.87" / 67 x 22 x 22 mm.
Weight: 1.98 oz / 56 g (including battery).
Product ID: E18R.11112

E28R V2.0

Rechargeable EDC Flashlight

- ✦ Max 1700 lumens output and 273 meters beam distance.
- ✦ Magnetic tail for hands-free use.
- ✦ Two-way body clip for versatile attachment.
- ✦ USB Type-C charging; 3 hours from depletion to fully charged.
- ✦ Unique warning light.



NEW



Size: 4.76" x 1.04" x 0.89" / 121 x 26.5 x 22.5 mm.
Weight: 4.52 oz / 128 g (including battery).
Product ID: E28R.111133

E35R

High-Performance EDC Flashlight

- ✦ Max 3100 lumens output.
- ✦ USB Type-C charging port.
- ✦ Magnetic base for hands-free use.
- ✦ Lockout function avoids accidental activation.



E-CP

Rechargeable Powerbank Flashlight

- ✦ Max 1600 lumens output and 222 meters beam distance.
- ✦ 5000mAh large-capacity battery.
- ✦ Support 18W fast charging and discharging.
- ✦ Unique body design and color.



E-STAR

Portable Self-powered Emergency Flashlight

- ✦ Single-handed power generation.
- ✦ Built-in super capacitor, light can be used even if without battery, no need to constantly press the handle.
- ✦ Made of ABS engineering plastics, in line with ergonomic industrial design.
- ✦ Supports USB Type-C charging, easily be charged by external devices.



LD02 V2.0



LD12R



LD22 V2.0



LD30R

PEN-SHAPED WORK LIGHT

> LIGHTING FOR EXTREMES



Clear anti-counterfeit watermark is visible under 365nm UV light.

The light head and tail switch are made of stainless steel which effectively avoids scratches, and gives the penlight a unique metal texture appearance.

Fitted with warm white LED - effective in medical inspections and daily lighting.


LD02 V2.0

Dual Light Sources EDC Penlight

- ✦ Fitted with a neutral white LED and a UV LED.
- ✦ Powered by one AAA battery.
- ✦ Three output levels and one UV light output for options.
- ✦ Tail switch for one-handed activation and output selection.
- ✦ Made of durable high-strength and oxidation-resistance aluminum and stainless steel.



Size: 3.62" x 0.53" x 0.53" / 92 x 13.5 x 13.5 mm.
Weight: 0.85 oz / 24 g (excluding battery).
Product ID: LD02.11112




LD22 V2.0

Multi-purpose Outdoor Flashlight

- ✦ Max 800 lumens output and 214 meters beam distance.
- ✦ Powered by a 1100mAh rechargeable Li-ion battery pack, compatible with 2 x AA batteries.
- ✦ Two body clip grooves for easy carry.
- ✦ Instant on with the tactical tail switch and output selection with the side switch.



Size: 5.83" x 0.85" x 0.71" / 148 x 21.5 x 18 mm.
Weight: 3.39 oz / 96 g (including battery).
Product ID: LD22.11113



LD12R

Dual Light Sources Multipurpose Portable Flashlight

- ✦ Max 600 lumens output and 186 meters beam distance.
- ✦ Rotate the light head to quickly choose between the main light and the side light.
- ✦ Magnetic body clip for hands-free use.
- ✦ Hidden Type-C charging port.

Utility Model Patent: ZL 202223499611.4



Size: 4.27" x 0.78" x 0.75" / 121 x 22 x 19 mm.
Weight: 2.61 oz / 74 g (including battery).
Product ID: LD12R.11111



NEW

LD30R

High-Performance Outdoor Flashlight

- ✦ Max 1700 lumens output and 267 meters beam distance.
- ✦ Tactical tail switch for instant activation.
- ✦ Side switch for mode selection.
- ✦ Strobe mode and SOS mode for outdoor activities.
- ✦ Two-way body clip for versatile attachment.



Size: 5.11" x 1.04" x 0.89" / 129.7 x 26.5 x 22.6 mm.
Weight: 4.66 oz / 132 g (including battery).
Product ID: LD30R.11111



NEW



PD SERIES



HOT



PD25R

NEW



PD32R

HOT



PD35 V3.0



PD35R

NEW



PD36R V2.0



PD36 TAC

HOT



PD36R Pro

NEW



PD40R V3.0

PD25R

Portable Rechargeable Flashlight

800LM

250M

70H

IP68

1X16340 700mAh
/1XCR123A



Hidden USB Type-C charging port.

Included two-position body clip.

Instant on with the tactical tail switch and output selection with the side switch.

General Mode					Strobe
Turbo	High	Med	Low	Eco	
800 lumens	350 lumens	150 lumens	30 lumens	5 lumens	800 lumens
44 minutes*	1 hour 30 minutes	2 hours 50 minutes	16 hours	70 hours	/

Size: 3.62" x 0.94" x 0.94 / 92 x 24 x 24 mm. Weight: 2.75 oz / 78 g (including battery). Product ID: PD25R.11111



PD32R

High-output Rechargeable Tactical Flashlight

- ✦ Max 1400 lumens output and 325 meters beam distance.
- ✦ Included a 3400mAh rechargeable Li-ion battery.
- ✦ Hidden USB Type-C charging port.
- ✦ Tail switch for instant activation, lockout function,and instant strobe.

NEW



Size: 5.31" x 1.04" x 0.93" / 135 x 26.5 x 23.6 mm.
Weight: 4.83 oz / 137 g (including battery).
Product ID: PD32R.11111

PD35 V3.0

High-performance Tactical Flashlight

- ✦ New long-distance LED.
- ✦ Pocket size for easy carry.
- ✦ Boot-up battery level indication and low-voltage warning.
- ✦ Instant activation with the tactical tail switch and output selection with the side switch.

Black Tropic green

Turbo	High	Med	Low	Eco	Strobe
1700 lumens	600 lumens	150 lumens	50 lumens	5 lumens	1700 lumens
1 hour 25 minutes	2 hours 35 minutes	8 hours 30 minutes	26 hours 25 minutes	230 hours	/

HOT



Size: 5.28" x 1.00" x 0.90" / 134 x 25.4 x 22.8 mm.
Weight: 2.95 oz / 83.5 g (excluding battery).
Product ID: PD35.11119, PD35.14119

PD36 TAC

Mechanical Tactical Flashlight

- ✦ Max 3000 lumens output and 274 meters beam distance.
- ✦ Powered by a single 21700 rechargeable Li-ion battery.
- ✦ Tactical and duty modes for different environments.
- ✦ Dual-function tactical switch to accurately activate the tactical function.



Size: 5.51" x 1.04" x 1.00" / 140 x 26.5 x 25.4 mm.
Weight: 3.24 oz / 92 g (excluding battery).
Product ID: PD36.11111

Utility Model Patent: ZL 201920500579.6

STAR TACTICAL FLASHLIGHTS

Fenix PD36 Series ➤ has become a classic since its release. It is deeply loved by users as being compact, portable, and multipurpose.



PD35R

Compact Rechargeable Tactical Flashlight

1700LM

353M

100H

IP68

1X18650 / 3400mAh

- ✦ Max 1700 lumens output.
- ✦ Luminus SFT40 LED with max 353 meters beam distance.
- ✦ Standard USB Type-C charging.
- ✦ Dual tail switch.



Size: 5.35" x 1.00" x 0.91" / 136 x 25.4 x 23.2 mm.
Weight: 4.94 oz / 140 g (including battery).
Product ID: PD35R.11111

PD36R V2.0

Compact Rechargeable Tactical Flashlight

1700LM

396M

482H

IP68

1X21700 5000mAh



Neck-mounted Type-C charging port supports 18W fast charging.
Tactical tail switch for instant activation; side switch for output selection.
Two-way body clip for versatile attachment.

Turbo	High	Med	Low	Eco	Strobe
1700 lumens	800 lumens	350 lumens	50 lumens	5 lumens	1700 lumens
3 hours 30 minutes	4 hours 15 minutes	7 hours 45 minutes	50 hours	482 hours	/

Size: 5.54" x 1.04" x 1.00" / 140.7 x 26.5 x 25.5 mm. Weight: 5.89 oz / 167 g (including battery). Product ID: PD36R.11115

PD36R Pro

Heavy-duty Rechargeable Tactical Flashlight



2800LM



380M



42H



IP68



1X21700
5000mAh



Turbo	High	Med	Low	Eco	Strobe
2800 lumens	1000 lumens	350 lumens	150 lumens	30 lumens	2500 lumens
3 hours 30 minutes	3 hours 55 minutes	8 hours 15 minutes	19 hours	42 hours	/

Supports USB Type-C charging,Inner waterproofing design.
Instant activation and instant strobe with dual tactical tail switch.
Momentary-on Strobe.
Included a 5000mAh battery.

Size: 5.74" x 1.04" x 1.01 " / 145.8 x 26.5 x 25.7mm. Weight: 5.96 oz / 169 g (including battery). Product ID: PD36R.11113, PD36R.22113

PD40R V3.0

Super Bright Mechanical Rotary Switching Flashlight

- ★ Max 3000 lumens output and 500 meters beam distance.
- ★ Powered by a single Fenix ARB-L21-5000 V2.0 battery.
- ★ Patented technique of rotary mode selection switching for accurate operation.
- ★ Standard USB Type-C charging port.
- ★ Capable of tail standing.



Size: 5.63" x 1.34" x 1.02 " / 143 x 34 x 26 mm.
Weight: 6.98 oz / 198 g (including battery).
Product ID: PD40R.11113

Utility Model Patent: ZL 201821227065.X





TK SERIES

› LIGHTING FOR EXTREMES

TK11R

Compact Military And Duty Flashlight



NEW



Size: 5.73" x 1.34" x 0.93" / 145.5 x 34 x 23.5 mm.
Weight: 4.14 oz / 117.5 g (excluding battery).
Product ID: TK11R.11111

- ✦ Max 1600 lumens output and 420 meters beam distance.
- ✦ Uses one Luminus SFT40 LED with a lifespan of 50,000 hours.
- ✦ Powered by a single 18650 rechargeable battery.
- ✦ Inner waterproof USB Type-C charging port.
- ✦ Instant strobe with the dual tail switch

TK16 V2.0

Dual Tail Switch Tactical Flashlight



HOT




Utility Model Patent: 201920500579.6
Size: 5.63" x 1.34" x 1.00" / 143 x 34 x 25.4 mm.
Weight: 3.95 oz / 112 g (excluding battery).
Product ID: TK16.11112, TK16.14113

- ✦ Max 3100 lumens output.
- ✦ Advanced Pulse-Frequency Transmission System (APF).
- ✦ Instant activation and strobe with the dual tail switch.
- ✦ Compact structure with a single-layer body.
- ✦ Stainless steel strike bezel inlaid tungsten steel breaking tips.

Black Tropic green

TK20R UE

Tactical Flashlight



NEW



Utility Model Patent: ZL 202321315946.8
Size: 6.05" x 1.34" x 1.00" / 153.7 x 34 x 25.4 mm.
Weight: 4.76 oz / 135 g (excluding battery).
Product ID: TK20R.22112, TK20R.19112, TK20R.14112, TK20R.12112

- ✦ Patented FlexiSensa Control switch for fast and single-handed operation.
- ✦ Tactical and Duty modes for flexibly needed choice.
- ✦ Customized camo color and stainless steel strike bezel.
- ✦ Max 2800 lumens output and 465 meters beam distance.
- ✦ Hidden USB Type-C charging port.

Desert camo Tan Tropic City gray



NEW

TK11R



HOT

TK16 V2.0



HOT

TK20R V2.0



NEW

TK20R UE



TK22 TAC



NEW

TK22R



TK26R



TK30




HOT


TK35UE V2.0


TK20R V2.0


Rechargeable Dual Rear-switch Multipurpose Flashlight

3000LM

475M

48H

IP68

1X21700
5000mAh

STAR TACTICAL FLASHLIGHT



- Instant strobe.
- Inner waterproof port.
- Dual tactical tail switch.
- Hidden USB Type-C charging port.

Turbo	High	Med	Low	Eco	Strobe
3000 lumens	1000 lumens	350 lumens	150 lumens	30 lumens	3000 lumens
2 hours 50 minutes	3 hours 10 minutes	7 hours	21 hours 20 minutes	48 hours	/


Utility Model Patent: ZL 201920500579.6
Size: 6.02" x 1.34" x 1.00" / 152 x 34 x 25.4mm. Weight: 7.20 oz / 204 g (including battery). Product ID: TK20R.11113


TK22 TAC


Military And Duty Flashlight


- ✦ Max 2800 lumens output and 540 meters beam distance.
- ✦ Tactical and Duty modes for flexibly needed choice and operation.
- ✦ Patented dual-function tactical switch for instantly tactical activation.
- ✦ Lockout function avoids accidental activation.
- ✦ Instant strobe


Utility Model Patent: ZL 201920500579.6

2800LM

540M

49.5H

IP68

1X21700
5000mAh



Size: 6.06" x 1.57" x 1.02" / 154 x 40 x 26 mm.
Weight: 5.50 oz / 156 g (excluding battery).
Product ID: TK22.11114

TK22R

Tactical And Duty Flashlight

- ✦ Max 3200 lumens output and 480 meters beam distance.
- ✦ Patented FlexiSensa Control switch for fast and convenient operation.
- ✦ Tactical and Duty modes for additional flexibility.
- ✦ Dual-function tactical switch for instant tactical activation and output selection.
- ✦ Hidden USB Type-C charging port.
- ✦ Stainless steel strike bezel inlaid tungsten steel breaking tips.

3200LM

480M

50H

IP68

1X21700
5000mAh

NEW



Size: 6.22" x 1.57" x 1.00" / 158 x 40 x 25.4 mm.
Weight: 7.69 oz / 218 g (including battery).
Product ID: TK22R.11111
Utility Model Patent: ZL 202321315946.8

TK26R

Tri-colored Tactical Law-Enforcing Flashlight

- ✦ Max 1500 lumens output and 350 meters beam distance.
- ✦ Red, white, and green light sources.
- ✦ Instant strobe with the dual tail switch.
- ✦ Inner waterproof USB Type-C charging port.

1500LM

350M

100H

IP68

1X18650 3400mAh
/2XCR123A




Size: 5.91" x 1.57" x 1.00" / 150 x 40 x 25.4 mm.
Weight: 5.54 oz /157 g (excluding battery).
Product ID: TK26R.11112

TK35UE V2.0

High-performance Dual Mode Tactical Flashlight

- ✦ Patented toggle switch for the selection of tactical and duty modes.
- ✦ Max 5000 lumens output.
- ✦ Dual tactical tail switch.
- ✦ Instant strobe.
- ✦ The light can be powered by a single 18650 or two CR123A batteries in emergency situations.

Utility Model Patent: ZL 201721574627.3



HOT

Size: 5.63" x 1.69" / 143 x 43 mm.
Weight: 7.13 oz / 202 g (excluding battery).
Product ID: TK35.11122

TK30

White Laser Tactical Flashlight

- ✦ Max 500 lumens output and 1200 meters beam distance.
- ✦ White laser light source.
- ✦ Instant activation with tactical tail switch and output selection with the functional side switch.
- ✦ Boot-up battery level indication, low-voltage warning, and intelligent memory circuit.



*Laser Classification: Class I / Class 1
Size: 6.22" x 1.26" x 1.02" / 158 x 32 x 26 mm.
Weight: 5.15 oz / 146 g (excluding battery).
Product ID: TK30.11111

HT SERIES



HT18



HT18R



HT30R



HT32

HT18

Long-Range Hunting Flashlight

- ✦ Max 1500 lumens output and 925 meters beam distance.
- ✦ Included red and green filter adapters, offering triple-colored lighting.
- ✦ Instant power activation with momentary tactical tail switch; output selection with the neck-mounted side switch.
- ✦ Included a Fenix ARB-L21-5000U USB rechargeable 21700 Li-ion battery.



HT18R

Long-Range Hunting Flashlight

- ✦ Max 2800 lumens output and 1100 meters beam distance.
- ✦ Included red and green filter adapters, offering triple-colored lighting.
- ✦ USB Type-C charging port with inner waterproofing treatment.
- ✦ Instant strobe with the dual tail switch.



HT30R

High-performance White Laser Flashlight

- ✦ White laser module makes beam distance up to 1500 meters.
- ✦ Hidden USB Type-C charging port.
- ✦ Included a 5000mAh large-capacity battery.
- ✦ Advanced Pulse-frequency Transmission System.
- ✦ Instant strobe and activation with the dual tail switch.



HT32

Outdoor Hunting Flashlight

- ✦ Max 2500 lumens output and 640 meters beam distance.
- ✦ The patented TIR lens diameter is 30% smaller, but the beam distance is doubled.
- ✦ Fitted with one Luminus SFT20 CG green light LED and one SFT20 RA red light LED.
- ✦ Green, red, and white light sources for a variety of lighting demands.
- ✦ Instant strobe with the dual tail switch.



LR SERIES



> LIGHTING FOR EXTREMES

LR35R

Mighty Searching Flashlight

- ✦ Max 10000 lumens output and 500 meters beam distance.
- ✦ Mid-size body for one-handed grip.
- ✦ Inner waterproof USB Type-C charging port.
- ✦ Lockout function avoids accidental activation.
- ✦ 90° beam angle with incredible broad beam improves searching efficiency.
- ✦ Can be powered by a single battery in emergency situations

Turbo	High	Med	Low	Eco	Strobe
10000 lumens	3000 lumens	1200 lumens	450 lumens	50 lumens	10000 lumens
1 hour 25 minutes	1 hour 35 minutes	3 hours 15 minutes	8 hours 20 minutes	80 hours	/

10000LM	500M	80H	IP68	2X21700
---------	------	-----	------	---------

HOT



Size: 5.51" x 2.03" x 1.83" / 140 x 51.5 x 46.5 mm.
Weight: 8.43 oz / 239 g (excluding battery).
Product ID: LR35R.11111

LR40R V2.0

Super Bright Spot-and-flood Searching Flashlight

- ✦ Max 15000 lumens output and 900 meters beam distance.
- ✦ Rotary toggle switch and an electronic switch for single-handed operation.
- ✦ Spotlight, floodlight and combined modes for different lighting demands.
- ✦ USB Type-C port supports 18W fast charging and USB-A port supports discharging.

15000LM	900M	177H	IP68	10.8V /5000mAh
---------	------	------	------	----------------

NEW



Size: 6.89" x 3.23" x 2.17" / 175 x 82 x 55 mm.
Weight: 29.72 oz / 842.5 g (including battery).
Product ID: LR40R.11112

LR50R

Multifunctional Super Bright Searching Flashlight

- ✦ Max 12000 lumens output and 950 lumens beam distance.
- ✦ Intelligent brightness downshifting sensor to avoid high temperature at close-range lighting.
- ✦ Instant Turbo activation rapidly responds to emergency situations.
- ✦ USB Type-C charging and discharging interface supports fast-charging protocols.

12000LM	950M	58H	IP68	3.6V/16000mAh /1~4X21700
---------	------	-----	------	--------------------------



Size: 6.42" x 3.46" x 2.36" / 163 x 88 x 60 mm.
Weight: 34.8 oz / 986 g (including battery).
Product ID: LR50R.11111

HOT



LR35R

NEW



LR40R V2.0



LR50R

NEW



LR60R

HOT



LR80R

LR60R

Mechanical Rotary Searching Flashlight

21000LM

1085M

113H

IP68

14.4V
/4000mAh



reddot award



Mechanical rotary switch for rapid brightness and mode selection.
OLED screen displays brightness level, remaining runtime and remaining battery level.
Multiple wearing ways: hand-held, one-handed grip, back it on the shoulder.

Search mode(Long range searching)					Camp mode(Large area lighting)				
Turbo	High	Med	Low	Eco	Med	High	Turbo	SOS	Strobe
Spot-and floodlight	Spotlight	Spotlight	Spotlight	Spotlight	Floodlight	Floodlight	Floodlight	Spotlight	Spot-and floodlight
21000 lumens	3000 lumens	1000 lumens	300 lumens	50 lumens	2000 lumens	6000 lumens	15000 lumens	300 lumens	9000 lumens
1 hour 50 minutes	3 hours 45 minutes	10 hours 40 minutes	24 hours 20 minutes	113 hours	5 hours 25 minutes	3 hours	2 hours 10 minutes	/	/

Size: 8.19" x 3.59" x 2.46" / 208 x 91 x 62.5 mm. Weight: 52.91 oz / 1500 g (including battery). Product ID: LR60R.11111

LR80R

Super Bright Handheld Searchlight

18000LM

1130M

300H

IP68

7.2V
/12000mAh

HOT



- ✦ High output, far-reaching beam shot, long-lasting runtime for wide-range searching lighting.
- ✦ High, low and flash modes for options.
- ✦ Intelligent brightness downshifting sensor to avoid high temperature at close-range lighting.
- ✦ Multiple wearing ways: hand-held, one-handed grip, back it on the shoulder.
- ✦ Can be used as a power bank for external digital devices.

Size: 10.20" x 4.25" x 2.13" / 259 x 108 x 54 mm.
Weight: 57.71 oz / 1636 g (including battery).
Product ID: LR80R.11115, LR80R.11112, LR80R.11113, LR80R.11111, LR80R.11114



WF SERIES



PROFESSIONAL EXPLOSION-PROOF FLASHLIGHTS

The Fenix explosion-proof flashlights ➤ are designed and manufactured in accordance with the international explosion-proof standard of the IECEx system, which has passed the necessary tests and was certified by IECEx, ATEX and CSA. Thus these products can be safely used in explosive gas and dust atmospheres, users feel relieved when working in flammable and explosive places.



WF05E

Intrinsically Safe Flashlight
(Can be safely used in Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 21 and Zone 22 as well)

 85LM	 54M	 80H	 IP66/IP68	 2XAAA
--	---	---	---	---

- ✦ Intrinsically explosion-proof.
- ✦ It has passed the necessary tests and was certified by IECEx, ATEX and SGS.
- ✦ Three output levels, max 85 lumens.
- ✦ The body clip is made of explosion-proof anti-static plastic.



Size: 5.29" x 0.75" x 0.59" / 134.5 x 19 x 14.9 mm.
Weight: 1.34 oz / 38 g (excluding batteries).
Product ID: WF05E.11112

WF11E

Magnetic Explosion-proof Flashlight
(Can be safely used in Zone 0, Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 20, Zone 21 and Zone 22 as well)

 200LM	 185M	 70H	 IP66/IP67	 3XAA
---	--	---	---	--

- ✦ Intrinsically explosion-proof.
- ✦ Made of explosion-proof and anti-static plastics.
- ✦ Magnetic light tail and body clip.
- ✦ It has passed the necessary tests and was certified by IECEx, ATEX and SGS.



Size: 6.59" x 1.93" x 0.94" / 167.5 x 49 x 24 mm.
Weight: 5.64 oz / 160 g (excluding batteries).
Product ID: WF11E.15117, WF11E.15116



WF05E



WF11E



WF30RE



WF26R

WF30RE

Intrinsically Safe Flashlight
(Can be safely used in Zone 1 and Zone 2, and it can be used in combustible dust areas: Zone 21 and Zone 22 as well)



280LM



170M



120H



IP66
/IP68



1XARB-L21-2600Ex



Intrinsically safe explosion-proof flashlight.
It has passed the necessary tests and was certified by IECEx, ATEX and CSA.
Specialized charger for convenient charging.
Orange-peel reflector for a soft and clean beam.

High	Med	Low	Strobe
280 lumens	120 lumens	30 lumens	280 lumens
6 hours 50 minutes	15 hours 40 minutes	120 hours	/

Size: 5.93" x 1.34" x 1.10" / 150.5 x 34 x 28 mm. Weight: 7.58 oz / 215 g (including battery). Product ID:WF30RE.11118,WF30RE.11120,WF30RE.11116, WF30RE.11114

WF26R

High-performance Cradle Charging Duty Flashlight

- ✦ Max 3000 lumens output and 450 meters beam distance.
- ✦ The magnetic charging cradle can be separated from the magnetic charging cable.
- ✦ Instant activation and instant strobe with dual tail switch.
- ✦ Boot-up battery level indication and low-voltage warning.





3000LM



450M



44.1H



IP68



1X 21700
5000mAh

Utility Model Patent: 201920500579.6
Size: 6.14" x 1.59" x 1.05" / 156 x 40.4 x 26.6 mm.
Weight: 7.83 oz / 222 g (including battery).
Product ID: WF26R.11111



WT SERIES



WT16R

Multipurpose And Rechargeable Work Light

- ✦ Combines spotlight, floodlight and yellow flash in one.
- ✦ Super magnets are placed in the back and tail of the light for metal connection.
- ✦ Widened stainless steel body clip for firm connection to pack and pocket.
- ✦ Battery level indication for instant checking of remaining battery level.



Size: 5.00" x 1.46" x 1.02" / 127 x 37 x 26 mm.
Weight: 4.55 oz / 129 g (including battery).
Product ID: WT16R.11111

WT25R

Rechargeable Pivoting Work Light

- ✦ Max 1000 lumens output and 220 meters beam distance.
- ✦ 105° adjustable head for use at different angles.
- ✦ Magnetic tail for hands-free use.
- ✦ Magnetic charging with the included magnetic charging cable.



Size: 5.33" x 1.16" x 0.95" / 135.3 x 29.4 x 24.1 mm.
Weight: 4.83 oz / 137 g (including battery).
Product ID: WT25R.11111

HEADLAMPS

Fenix headlamps > have an unequalled fit and finish. Our headlamps provide essential lighting for hikers, runners, campers and hunters, and are reliable light sources for many industrial workers. Fenix applies its years of LED experience to the crafting of ultra-bright headlamps that are comfortable to wear and easy to use in a variety of conditions. Whether your adventures or works need ultra-light all-day comfort or high-performance lighting for an extended expedition, the Fenix Headlamp series has a lamp for the occasion. Grab a Fenix headlamp for hands-free illumination.



HL SERIES



HL16



HL18R-T



HL32R-T



HL40R

HL16

Lightweight Outdoor Headlamp

- ★ White and red light sources for a variety of lighting demands.
- ★ Dual switch for easy and fast operation.
- ★ Replaceable battery design.
- ★ 60° adjustable angle.

Black Chartreuse Pink

450LM

104M

100H

IP66

3XAAA



Size: 2.52" x 1.89" x 1.06" / 64 x 48 x 27 mm.
Weight: 3.43 oz / 97.2 g (including battery).
Product ID: HL16.14111, HL16.11111, HL16.24111

HL18R-T

Lightweight Trail Running Headlamp

- ★ Max 500 lumens output.
- ★ Lockout function avoids accidental activation.
- ★ Dual switch for easy and fast operation.
- ★ Two power options, micro USB charging.
- ★ Single-handed operation with the new SPORT Headband Fit System.

Spotlight High	Spotlight Med	Spotlight Low	Floodlight Low	Floodlight SOS
500 lumens	200 lumens	70 lumens	30 lumens	4 lumens
3 hours	8 hours	20 hours	30 hours	300 hours

asia outdoor

500LM

82M

30H

IP66

1x1300mAh /3XAAA



Size: 2.70" x 1.85" x 1.55" / 68.5 x 45 x 39.5 mm.
Weight: 2.23 oz / 63.2 g (excluding battery & including headband).
Product ID: HL18R-T.11111

HL32R-T

High-performance Trail Running Headlamp

- ★ Quality magnesium alloy material, lightweight and durable.
- ★ Frequency sensing: the brightness changes along with the speed.
- ★ Separately controlled spotlight and floodlight.
- ★ Single-handed operation with the new SPORT Headband Fit System.

Black Rose red Dark blue

800LM

132M

150H

IP66

1x1900mAh /3XAAA



Size: 2.60" x 1.77" x 1.18" / 66 x 45 x 30 mm.
Weight: 7.32 oz / 107 g (including battery).
Product ID: HL32R-T.16111, HL32R-T.11111, HL32R-T.13111

HL40R

All-Round Rotary Focusing Headlamp

- ★ Max 600 lumens output.
- ★ One-handed rotary focusing of spotlight and floodlight.
- ★ Overlapping headband, large bearing area.
- ★ Micro USB charging.
- ★ Battery level indication and lockout function.

Grey Blue

600LM

147M

200H

IP66

2000mAh



Size: 2.68" x 2.13" x 1.65" / 68 x 54 x 42 mm.
Weight: 4.59 oz / 130 g (including battery and headband).
Product ID: HL40R.12111, HL40R.13111

HM SERIES



> LIGHTING FOR EXTREMES

HM23

Compact And Ultralight Headlamp

- ✦ Made of high-strength aluminum.
- ✦ 180° adjustable angle.
- ✦ Three output levels for kinds of lighting demands.
- ✦ One-switch control for easy and fast operation.
- ✦ Low-voltage warning.

Utility Model Patent: ZL 201720607070.2

240LM

63M

100H

IP68

1XAA



Size: 2.74" x 1.57" x 1.26"/ 69.5 x 40 x 32 mm.
Weight: 2.15 oz / 61 g (excluding battery).
Product ID: HM23.11111

HM50R V2.0

High-performance Dual-purpose Headlamp

- ✦ Detachable structure for various wearing ways.
- ✦ Max 700 lumens output for various kinds of outdoor lighting needs.
- ✦ White and red light sources for different applications.
- ✦ USB Type-C charging for convenient use.
- ✦ Cold-resistant ability.

Utility Model Patent: ZL 201720607070.2

700LM

115M

42H

IP68

1X700mAh

HOT



Size: 2.52" x 1.42" x 1.26" / 64 x 36 x 32 mm.
Weight: 2.75 oz / 78 g (including battery and headband).
Product ID: HM50R.11113

HM60R

Intelligent Frequency-sensing Outdoor Headlamp

- ✦ Max 1300 lumens output and 120 meters beam distance.
- ✦ Spotlight, floodlight and red light combined.
- ✦ Frequency sensing: the brightness changes along with the speed.
- ✦ Hidden inner waterproof USB Type-C charging interface.
- ✦ Made of quality PC and aluminum, lightweight and wear-resistant.

Spotlight Turbo	Spotlight High	Spotlight Med	Spotlight Low	Floodlight High	Floodlight Med	Floodlight Low	Floodlight Red Light	Floodlight Red Flash
1300 lumens	350 lumens	130 lumens	30 lumens	350 lumens	70 lumens	5 lumens	5 lumens	5 lumens
2 hours	8 hours	18 hours	54 hours	8 hours	24 hours	300 hours	100 hours	200 hours

1300LM

120M

300H

IP68

1X3400mAh



Utility Model Patent: ZL 201720607070.2
Size: 3.35" x 1.77" x 1.77" / 85 x 45 x 45 mm.
Weight: 5.54 oz / 157 g (including battery and headband).
Product ID: HM60R.11113



HM23

HOT



HM50R V2.0



HM60R



HM61R V2.0

NEW



HM62-T



HM65R

NEW



HM65R-T V2.0



HM70R



HM71R

NEW



HM75R

HM61R V2.0

Dual Light Source Multifunctional Headlamp

- ✦ Max 1600 lumens output and 300 hours runtime.
- ✦ Can be used as a flashlight.
- ✦ White and red light sources for a variety of lighting demands.
- ✦ Magnetic charging; battery level indication; charging indication.
- ✦ Magnetic tail, right-angled lighting.



HM62-T

High-performance Magnesium Trail Running Headlamp

- ✦ White and red light sources for different applications.
- ✦ Lightweight magnesium material.
- ✦ Single-handed operation with the new two-way SPORT Headband Fit System.
- ✦ Emergency whistle.
- ✦ Lockout function avoids accidental activation.



HM65R

Dual Lighting Sources Reliable Magnesium Headlamp

- ✦ Max 1400 lumens output.
- ✦ Separately controlled spotlight and floodlight.
- ✦ Dustproof, waterproof and impact-resistance.
- ✦ Quality aluminum, magnesium and PC material, lightweight and durable.
- ✦ USB Type-C fast charging.
- ✦ Electronic lockout function avoids accidental activation.



ONE CHARGING FOR 100KM RUNNING

As more and more running lovers participate in trail running races, the requirements for headlamps are becoming more and more stringent. The Fenix HM65 series is highly praised by trail runners due to its high performance and long runtime. The slogan "One charging for 100km running " is therefore widely spread.

In the meantime, Fenix has listened to the opinions of the users and then we have the upgraded version HM65R-T V2.0. On the basis of brightness improvement and battery life, the headlamp is more comfortable to wear with the top headband removed. Especially the new two-way SPORT Headband Fit System. It couldn't be more perfect to adjust the headband with a single hand while running.



HM65R-T V2.0

Dual Light Sources Magnesium Trail Running Headlamp

- Black
- Nebula
- Dark purple

1600LM

170M

300H

IP68

1X3400mAh



TWO-WAY SPORT HEADBAND FIT SYSTEM



- Lightweight magnesium material.
- White and warm white light sources for different applications.
- Single-handed operation with the new two-way SPORT Headband Fit System.
- Emergency whistle.
- USB Type-C charging port.

WHITE LIGHT			WARM WHITE LIGHT				SOS
High	Med	Low	High	Med	Low	Eco	SOS
1600 lumens	400 lumens	130 lumens	800 lumens	400 lumens	130 lumens	5 lumens	5 lumens
3 hours	12 hours	24 hours	6 hours	12 hours	24 hours	300 hours	600 hours

Utility Model Patent: ZL 202321621763.9 Size: 3.15" x 1.84" x 1.37" / 80 x 46.8 x 34.9 mm. Weight: 4.94 oz / 140 g (including battery and headband).
Product ID: HM65R-T.11114, HM65R-T.23115, HM65R-T.18116

HM70R

Triple Light Source Rechargeable 21700-Powered Headlamp

1600LM

186M

100H

IP68

1X21700 / 1X18650



- Included a 5000mAh battery with a 100 hours runtime.
- Hidden USB Type-C charging port fast charging.
- Large thumb-sized switch for easy and fast operation.
- White, neutral white and red light sources for different applications.

Spotlight Turbo	Spotlight High	Spotlight Med	Spotlight Low	Floodlight Red Light	Floodlight Med	Floodlight High	Floodlight Red Flash
1600 lumens	500 lumens	150 lumens	30 lumens	8 lumens	70 lumens	400 lumens	5 lumens
4 hours	6 hours	30 hours	100 hours	400 hours	48 hours	8 hours	800 hours

Utility Model Patent: ZL 201720607070.2 Size: 3.72" x 2.01" x 1.81" / 94.5 x 51 x 46 mm. Weight: 7.27 oz / 206 g (including battery). Product ID: HM70R.11111

HM71R

High-performance Rechargeable Industrial Headlamp


- ★ Max 2700 lumens output.
- ★ Spotlight and floodlight combined.
- ★ Max 400 hours runtime.
- ★ Multiple wearing ways for different applications.



HM75R

Rechargeable Industrial Headlamp With Ultra-long Runtime

- ★ Max 1600 lumens output.
- ★ Two power sources for free choice.
- ★ Rotary switch and electronic switch for easy and fast operation.
- ★ Lightweight magnesium alloy material.
- ★ Battery case features a quick-release structure for various wearing ways.
- ★ Two USB Type-C ports with inner waterproofing treatment.

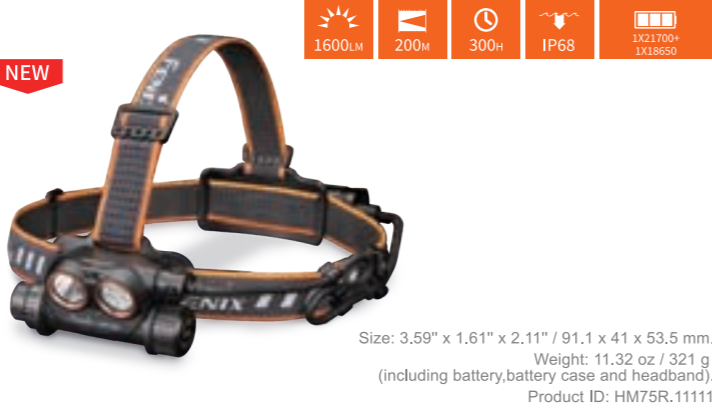

HP SERIES



HP16R



HP25R V2.0



HP35R



HP30R V2.0

HP16R

High-Performance Rechargeable Outdoor Headlamp


- ★ Max 1250 lumens output.
- ★ Two power sources for free choice.
- ★ USB Type-C charging port fast charging.
- ★ Separately controlled dual switch; lockout function avoids accidental activation.
- ★ Made of quality plastics and aluminum, integrated die-casting for better heat dissipation and safety performance.
- ★ White, neutral white and red lights combined.



HP25R V2.0

Rechargeable Work Headlamp With Ultra-long Runtime

- ★ Max 1600 lumens output.
- ★ Spotlight, floodlight, and red light combined.
- ★ High-reliability aluminum offers excellent heat dissipation.
- ★ USB Type-C charging.
- ★ Powered by a 21700 battery and compatible with a 18650 battery.
- ★ Lockout function avoids accidental activation.

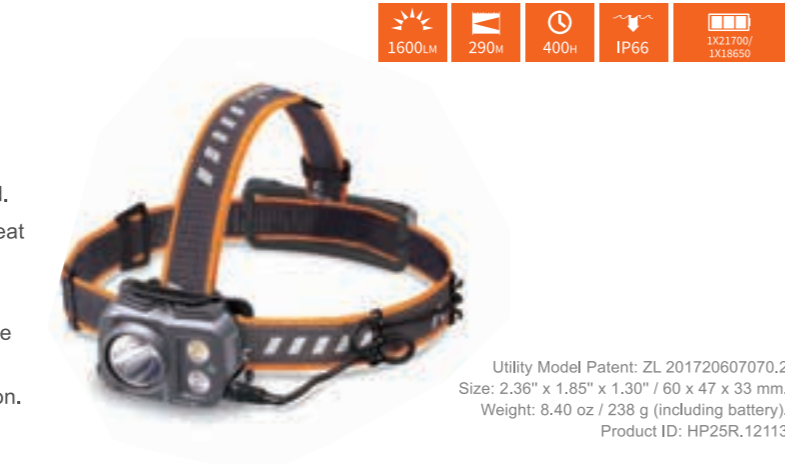

HP35R

Reliable Separate Search&Rescue Headlamp


- ★ Max 4000 lumens output and 450 meters beam distance.
- ★ Power bank function.
- ★ Red warning light.
- ★ NVG mount base plus widened headband allow the flashlight to be mounted securely on different sizes of helmets.
- ★ White and neutral white light sources with high CRI.



HP30R V2.0

Ultrahigh-performance Separate Search&Rescue Headlamp

- ★ Max 3000 lumens output.
- ★ Twisty switch for easy and fast operation.
- ★ A waist-worn battery case can be placed in pocket and pack.
- ★ USB Type-C charging port fast charging.
- ★ Power bank function.

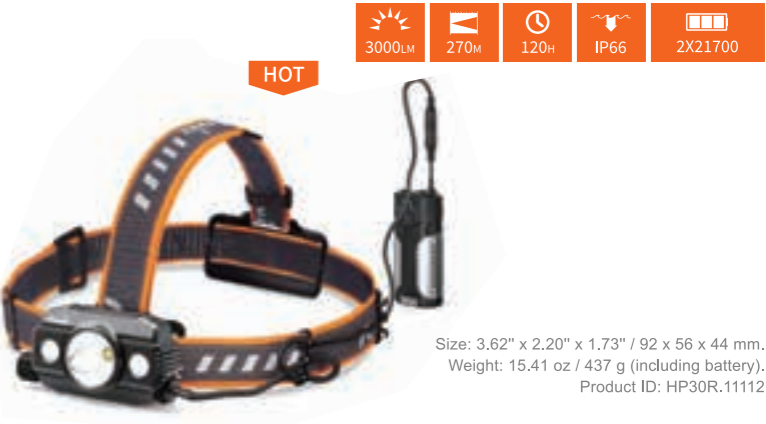

WH SERIES

GL SERIES

WH23R

Smart Induction Headlamp

- ✦ Max 600 lumens output and 100 meters beam distance.
- ✦ Spotlight, floodlight and combined output.
- ✦ Rotary switch for precise operation even with gloves.
- ✦ Gesture sensing for on/off.
- ✦ The center-rotating headlamp holder balances and improves the comfort of wearing.



Size: 3.40" x 1.77" x 1.72" / 86.45 x 45 x 43.72 mm.
Weight: 4.06 oz / 115 g (including battery).
Product ID: WH23R.19111



NEW



GL06/GL06-365

HOT



GL19R

HOT



GL22

NEW



GL22R



GL19R

Dual-output Rechargeable Tactical Light

1200LM

210M

2H

IP68

1X18350



GL06 / GL06-365

Pocket Pistol Tactical Light

600LM

140M

50min

IPX7

1X700mAh

- ✦ GL06 is specifically designed for guns with both Glock universal rail and Picatinny rail.
- ✦ GL06-365 is specifically designed for guns with SIG-Sauer P365 rail, P365 XL rail or other rails (SIG-Sauer P365 rail, P365X rail, P365-380 rail, P365XL rail, P365 SAS rail, and other types of rail with the same size).
- ✦ QD lever for quick install and quick detach.
- ✦ Instant strobe.
- ✦ Dual tail switch for fast, single-handed operation.



Size: 2.40" x 1.11" x 0.93" / 61 x 28.15 x 23.5 mm.
Weight: GL06: 2.53 oz / 69.1 g (including battery).
GL06-365: 2.45 oz / 69.4 g (including battery).
Product ID: GL06.11111, GL06.11112

Patented quick-release structure.

USB Type-C charging port.

Two-handed operation with dual tactical tail switch.

Instant strobe.

Design for guns with both GLOCK universal rail and Picatinny rail.



Glock rail key
for GLOCK universal rail

1913 rail key
for Picatinny rail

Turbo	High	Strobe
1200 lumens	350 lumens	1200 lumens
1 hour	2 hours	/

Utility Model Patent: ZL 202120460847.3
Size: 3.03" x 1.35 x 1.19" / 77.3 x 34.2 x 30.2 mm.
Weight: 3.53 oz / 100 g (including battery).
Product ID: GL19R.11111

GL22

Red Laser Tactical Light

- ★ Max 750 lumens output and 180 meters beam distance.
- ★ Precise red laser sight.
*Laser parameters: CLASS 3R laser product, laser wavelength 640-660nm, laser optical power output <5mW.
- ★ Design for guns with tactical rails.
- ★ Two-handed operation with dual tactical tail switch.
- ★ Instant strobe.

HOT



750LM

180M

17H

IP66

1X700mAh / 1XCR123A

White Light	Red Laser Light	Strobe
750 lumens	/	750 lumens
35 minutes	17 hours	/

Size: 2.64" x 1.65" x 1.22" / 67 x 42 x 31 mm.
Weight: 3.32 oz / 94 g (including battery).
Product ID: GL22.11111

GL22R

Rechargeable Laser Tactical light

- ★ Precise green laser sight.
- ★ Specially designed high-intensity lens for close-quarter combat.
- ★ USB Type-C charging port.
- ★ Two-handed operation with dual tactical tail switch.

NEW



1200LM

230M

17H

IP66

1X18350

Size: 3.19" x 0.98" x 1.69" x 1.14" / 81 x 25 x 43 x 29 mm.
Weight: 4.02 oz / 114 g (including battery).
Product ID: GL22R.11111

BC SERIES



BC05R V2.0



BC15R



BC21R V3.0



BC25R



BC26R



BC30 V2.0

BC05R V2.0

Ultra-compact Rechargeable Bicycle Taillight

- ✦ Max 15 lumens output and 50 meters alerting distance.
- ✦ Battery level indication.
- ✦ USB Type-C charging.
- ✦ Matched with the body clip, can be used as a backpack light, or chest light.
- ✦ Single switch for easy and fast control.



Size: 2.01" x 0.87" x 0.87" / 51 x 22 x 22 mm.
Weight: 0.99 oz / 28 g (including battery).
Product ID: BC05R.11113

BC15R

Lightweight Cut-off Facula Line Bicycle Light

- ✦ Max 400 lumens output and 78 meters beam distance.
- ✦ USB Type-C charging.
- ✦ Can be installed on the bike in either direction.
- ✦ One switch control.
- ✦ Anti-glare cut-off facula line.
- ✦ Quick-release bike mount, easily operated.



NEW



Size: 4.02" x 1.24" x 1.22" / 102 x 31.5 x 31 mm.
Weight: 3.84 oz / 109 g (including battery).
Product ID: BC15R.11111

DUAL DISTANCE BEAM SYSTEM

Fenix bicycle lights feature a unique Dual Distance Beam System and unique optical lens. Using upward beam reflection, forming auxiliary illumination immediately in front of the bicycle where the ordinary bicycle light can not reach. Cycling safety can't be affected by lighting shortage.



BC21R V3.0

High-performance Front Bicycle Light For Cycle-racing

- ✦ Max 1200 lumens output and 142 meters beam distance.
- ✦ USB Type-C charging.
- ✦ Quick-release design, two-step assembly and disassembly.
- ✦ Easy and fast operation with a single switch.
- ✦ Boot-up battery level indication and low-voltage warning.
- ✦ Can be used as a helmet light with the Fenix ALD-08 bicycle light helmet holder.



Size: 4.33" x 1.14" x 1.06" / 108 x 29 x 27 mm.
Weight: 4.87oz / 157 g (including battery).
Product ID: BC21R.12113

BC25R

Lightweight Cut-Off Facula Line Bicycle Light

- ✦ Max 600 lumens output.
- ✦ Anti-glare cut-off facula line.
- ✦ Micro USB rechargeable.
- ✦ One switch control.
- ✦ Quick-release bike mount, easily operated.



Utility Model Patent: ZL 201720600803.X
Size: 4.45" x 1.26" x 1.22" / 113 x 32 x 31 mm
Weight: 5.47 oz / 155 g (including mount and battery)
Product ID: BC25R.11111

Black Iron grey





CL SERIES

BC26R

Ultra Bright Rechargeable Mountain Bicycle Light

- ✦ Max 1600 lumens output and 169 meters beam distance.
- ✦ USB Type-C charging.
- ✦ Quick-release design, two-step assembly and disassembly.
- ✦ Easy and fast operation with a single switch.
- ✦ Flash mode warns backside approaching drivers and passengers.
- ✦ Can be installed on the stopwatch holder with ALD-10.
- ✦ Can be used as a helmet light with the Fenix ALD-08 bicycle light helmet holder.



HOT



Size: 4.45" x 1.14" x 1.06" / 113 x 29 x 27 mm.
Weight: 5.47 oz / 155 g (including battery).
Product ID: BC26R.11111

Turbo	High	Med	Low	Flash
1600 lumens	600 lumens	200 lumens	50 lumens	600 lumens
3,5 hours	9,5 hours	18 hours	65 hours	/

BC30 V2.0

Wireless Control Metal Bicycle Light

- ✦ Max 2200 lumens output.
- ✦ Smart wireless control switch.
- ✦ All-metal housing.
- ✦ Quick-release bicycle mount, easy to assemble and disassemble.
- ✦ Dual Distance Beam System.
- ✦ Smart wireless control switch.

HOT



Size: 4.72" x 1.99" x 1.25" / 120 x 50.5 x 31.8 mm.
Weight: 5.43 oz / 154 g (excluding battery).
Product ID: BC30.11112

Burst	High	Med	Low	Eco/EDC	Flash
2200 lumens	1500 lumens	600 lumens	200 lumens	50 lumens	600/50 lumens
/	2,3 hours	6 hours	16 hours	50 hours	/



CL20R

HOT



CL28R

NEW



CL22R

HOT



CL30R

NEW



CL26R Pro

ENJOY CAMPING

Whether it is for hiking, camping or outdoor dining, Fenix camping lanterns will supply your bright light. Fenix lanterns are built to withstand the harsh conditions of outdoor use. Their versatile power sources, brilliant neutral white glow, and easy-to-use interface make them perfect for the most rugged campers on the planet. Fenix lanterns can last you longer due to their extreme durability.



CL20R

Micro USB Rechargeable Camping Lantern

- ✦ Max 300 lumens and 200 hours runtime.
- ✦ White and red light sources.
- ✦ Magnetic bottom and hanging loop.
- ✦ Micro USB rechargeable.
- ✦ Made of quality plastics and high transparent material - smooth anti-glaring beam.

Orange Blue



Size: 2.83" x 1.97" x 1.63" / 72 x 50 x 41.5 mm.
Weight: 3.21 oz / 91 g (including battery).
Product ID: CL20R.15111, CL20R.13111

300LM

15M

200H

IP66

1X1600mAh

CL22R

Family Camping Lantern

- ✦ Max 500 lumens output and 200 hours runtime.
- ✦ Dual rotary switches allow free adjustment of the brightness and mode selection.
- ✦ Multiple directional lighting.
- ✦ Sturdy built-in hook.
- ✦ Colorful atmosphere lights.
- ✦ Classic Rome column appearance design.

NEW



Size: 4.45" x 1.65" x 1.50" / 113 x 42 x 38 mm.
Weight: 4.66 oz / 132 g (including battery).
Product ID: CL22R.11111

500LM

15M

200H

IP65

1X2600mAh

CL28R

Multifunctional Outdoor Lantern

2000LM

58M

360H

IP66

2X5000mAh



Dual rotary switches allow free adjustment of the brightness and color temperature. 360° rotary handle makes all-around lighting possible. USB Type-C charging/discharging port and USB-A discharging port. The lantern handle can be attached to magnetic metal surfaces. White and red light sources.

White Light			Red Light	
High	Med	Low	Red Constant-on	Red Flash
2000 lumens	1000 lumens	10 lumens	9 lumens	9 lumens
9 hours	10 hours	360 hours	170 hours	340 hours

Utility Model Patent: ZL2021232781024
Design Patent: ZL202130698237.2
Size: 3.94" x 3.82" x 1.61" / 100 x 97 x 41 mm. Weight: 13.26 oz / 376 g (including battery). Product ID: CL28R.12111




CL26R Pro

Multifunctional Portable Camping Lantern

- ✦ Rotary toggle switch and electronic switch.
- ✦ Top magnetic absorption.
- ✦ White and red light sources.
- ✦ Multiple lighting combinations.
- ✦ USB Type-C charging port.
- ✦ USB-A discharging port.

Olive Drab White Marble Grey Camo

NEW



Size: 2.60" x 2.34" x 4.49" / 66 x 59.5 x 114 mm.
Weight: 7.02 oz / 199 g (excluding battery).
Product ID: CL26R.14112, CL26R.22112, CL26R.20112

CL30R

Charge And Discharge Camping Lantern

- ✦ Max 650 lumens output, 35 meters beam diameter.
- ✦ Independent circuit design.
- ✦ Micro USB charging and discharging function.
- ✦ Built-in hanging loop and tripod socket interface.
- ✦ Can be floated on the water.

Black Grey

HOT



Size: 5.35" x 3.66" x 3.66" / 136 x 93 x 93 mm.
Weight: 14.5 oz / 412 g (excluding battery).
Product ID: CL30R.11111, CL30R.12111

ACCESSORIES

Fenix has been striving and succeeding in developing creative and practical accessories to enhance and dramatically improve the performance of our lighting products. Currently, Fenix offers users accessories including diffuser tips, filter adapters, traffic wands, remote switches, etc. to satisfy consumers' requirements.



BATTERIES



Rechargeable Batteries

A protective circuit is built into the anode and covered with a riveted steel hat. The battery is fully covered with the steel shell, thus eliminating the potential risk of short-circuiting caused by collision or impact.

- Triple overheat design, safe and reliable.
- Built-in overcharge and overdischarge protection circuit to ensure battery life.
- The circuit board is fully protected, with high reliability and impact resistance.

Model	Type	Capacity	Voltage
ARE-L18-18650	18650	1800 mAh	3.7V
ARE-L18-21700	21700	2600 mAh	3.7V
ARE-L18-26650	26650	3600 mAh	3.7V
ARE-L18-30000	30000	4200 mAh	3.7V
ARE-L18-35000	35000	4800 mAh	3.7V
ARE-L18-40000	40000	5400 mAh	3.7V
ARE-L18-45000	45000	6000 mAh	3.7V
ARE-L18-50000	50000	6600 mAh	3.7V
ARE-L18-55000	55000	7200 mAh	3.7V
ARE-L18-60000	60000	7800 mAh	3.7V
ARE-L18-65000	65000	8400 mAh	3.7V
ARE-L18-70000	70000	9000 mAh	3.7V
ARE-L18-75000	75000	9600 mAh	3.7V
ARE-L18-80000	80000	10200 mAh	3.7V
ARE-L18-85000	85000	10800 mAh	3.7V
ARE-L18-90000	90000	11400 mAh	3.7V
ARE-L18-95000	95000	12000 mAh	3.7V
ARE-L18-100000	100000	12600 mAh	3.7V
ARE-L18-105000	105000	13200 mAh	3.7V
ARE-L18-110000	110000	13800 mAh	3.7V
ARE-L18-115000	115000	14400 mAh	3.7V
ARE-L18-120000	120000	15000 mAh	3.7V
ARE-L18-125000	125000	15600 mAh	3.7V
ARE-L18-130000	130000	16200 mAh	3.7V
ARE-L18-135000	135000	16800 mAh	3.7V
ARE-L18-140000	140000	17400 mAh	3.7V
ARE-L18-145000	145000	18000 mAh	3.7V
ARE-L18-150000	150000	18600 mAh	3.7V
ARE-L18-155000	155000	19200 mAh	3.7V
ARE-L18-160000	160000	19800 mAh	3.7V
ARE-L18-165000	165000	20400 mAh	3.7V
ARE-L18-170000	170000	21000 mAh	3.7V
ARE-L18-175000	175000	21600 mAh	3.7V
ARE-L18-180000	180000	22200 mAh	3.7V
ARE-L18-185000	185000	22800 mAh	3.7V
ARE-L18-190000	190000	23400 mAh	3.7V
ARE-L18-195000	195000	24000 mAh	3.7V
ARE-L18-200000	200000	24600 mAh	3.7V
ARE-L18-205000	205000	25200 mAh	3.7V
ARE-L18-210000	210000	25800 mAh	3.7V
ARE-L18-215000	215000	26400 mAh	3.7V
ARE-L18-220000	220000	27000 mAh	3.7V
ARE-L18-225000	225000	27600 mAh	3.7V
ARE-L18-230000	230000	28200 mAh	3.7V
ARE-L18-235000	235000	28800 mAh	3.7V
ARE-L18-240000	240000	29400 mAh	3.7V
ARE-L18-245000	245000	30000 mAh	3.7V
ARE-L18-250000	250000	30600 mAh	3.7V
ARE-L18-255000	255000	31200 mAh	3.7V
ARE-L18-260000	260000	31800 mAh	3.7V
ARE-L18-265000	265000	32400 mAh	3.7V
ARE-L18-270000	270000	33000 mAh	3.7V
ARE-L18-275000	275000	33600 mAh	3.7V
ARE-L18-280000	280000	34200 mAh	3.7V
ARE-L18-285000	285000	34800 mAh	3.7V
ARE-L18-290000	290000	35400 mAh	3.7V
ARE-L18-295000	295000	36000 mAh	3.7V
ARE-L18-300000	300000	36600 mAh	3.7V
ARE-L18-305000	305000	37200 mAh	3.7V
ARE-L18-310000	310000	37800 mAh	3.7V
ARE-L18-315000	315000	38400 mAh	3.7V
ARE-L18-320000	320000	39000 mAh	3.7V
ARE-L18-325000	325000	39600 mAh	3.7V
ARE-L18-330000	330000	40200 mAh	3.7V
ARE-L18-335000	335000	40800 mAh	3.7V
ARE-L18-340000	340000	41400 mAh	3.7V
ARE-L18-345000	345000	42000 mAh	3.7V
ARE-L18-350000	350000	42600 mAh	3.7V
ARE-L18-355000	355000	43200 mAh	3.7V
ARE-L18-360000	360000	43800 mAh	3.7V
ARE-L18-365000	365000	44400 mAh	3.7V
ARE-L18-370000	370000	45000 mAh	3.7V
ARE-L18-375000	375000	45600 mAh	3.7V
ARE-L18-380000	380000	46200 mAh	3.7V
ARE-L18-385000	385000	46800 mAh	3.7V
ARE-L18-390000	390000	47400 mAh	3.7V
ARE-L18-395000	395000	48000 mAh	3.7V
ARE-L18-400000	400000	48600 mAh	3.7V
ARE-L18-405000	405000	49200 mAh	3.7V
ARE-L18-410000	410000	49800 mAh	3.7V
ARE-L18-415000	415000	50400 mAh	3.7V
ARE-L18-420000	420000	51000 mAh	3.7V
ARE-L18-425000	425000	51600 mAh	3.7V
ARE-L18-430000	430000	52200 mAh	3.7V
ARE-L18-435000	435000	52800 mAh	3.7V
ARE-L18-440000	440000	53400 mAh	3.7V
ARE-L18-445000	445000	54000 mAh	3.7V
ARE-L18-450000	450000	54600 mAh	3.7V
ARE-L18-455000	455000	55200 mAh	3.7V
ARE-L18-460000	460000	55800 mAh	3.7V
ARE-L18-465000	465000	56400 mAh	3.7V
ARE-L18-470000	470000	57000 mAh	3.7V
ARE-L18-475000	475000	57600 mAh	3.7V
ARE-L18-480000	480000	58200 mAh	3.7V
ARE-L18-485000	485000	58800 mAh	3.7V
ARE-L18-490000	490000	59400 mAh	3.7V
ARE-L18-495000	495000	60000 mAh	3.7V
ARE-L18-500000	500000	60600 mAh	3.7V
ARE-L18-505000	505000	61200 mAh	3.7V
ARE-L18-510000	510000	61800 mAh	3.7V
ARE-L18-515000	515000	62400 mAh	3.7V
ARE-L18-520000	520000	63000 mAh	3.7V
ARE-L18-525000	525000	63600 mAh	3.7V
ARE-L18-530000	530000	64200 mAh	3.7V
ARE-L18-535000	535000	64800 mAh	3.7V
ARE-L18-540000	540000	65400 mAh	3.7V
ARE-L18-545000	545000	66000 mAh	3.7V
ARE-L18-550000	550000	66600 mAh	3.7V
ARE-L18-555000	555000	67200 mAh	3.7V
ARE-L18-560000	560000	67800 mAh	3.7V
ARE-L18-565000	565000	68400 mAh	3.7V
ARE-L18-570000	570000	69000 mAh	3.7V
ARE-L18-575000	575000	69600 mAh	3.7V
ARE-L18-580000	580000	70200 mAh	3.7V
ARE-L18-585000	585000	70800 mAh	3.7V
ARE-L18-590000	590000	71400 mAh	3.7V
ARE-L18-595000	595000	72000 mAh	3.7V
ARE-L18-600000	600000	72600 mAh	3.7V
ARE-L18-605000	605000	73200 mAh	3.7V
ARE-L18-610000	610000	73800 mAh	3.7V
ARE-L18-615000	615000	74400 mAh	3.7V
ARE-L18-620000	620000	75000 mAh	3.7V
ARE-L18-625000	625000	75600 mAh	3.7V
ARE-L18-630000	630000	76200 mAh	3.7V
ARE-L18-635000	635000	76800 mAh	3.7V
ARE-L18-640000	640000	77400 mAh	3.7V
ARE-L18-645000	645000	78000 mAh	3.7V
ARE-L18-650000	650000	78600 mAh	3.7V
ARE-L18-655000	655000	79200 mAh	3.7V
ARE-L18-660000	660000	79800 mAh	3.7V
ARE-L18-665000	665000	80400 mAh	3.7V
ARE-L18-670000	670000	81000 mAh	3.7V
ARE-L18-675000	675000	81600 mAh	3.7V
ARE-L18-680000	680000	82200 mAh	3.7V
ARE-L18-685000	685000	82800 mAh	3.7V
ARE-L18-690000	690000	83400 mAh	3.7V
ARE-L18-695000	695000	84000 mAh	3.7V
ARE-L18-700000	700000	84600 mAh	3.7V
ARE-L18-705000	705000	85200 mAh	3.7V
ARE-L18-710000	710000	85800 mAh	3.7V
ARE-L18-715000	715000	86400 mAh	3.7V
ARE-L18-720000	720000	87000 mAh	3.7V
ARE-L18-725000	725000	87600 mAh	3.7V
ARE-L18-730000	730000	88200 mAh	3.7V
ARE-L18-735000	735000	88800 mAh	3.7V
ARE-L18-740000	740000	89400 mAh	3.7V
ARE-L18-745000	745000	90000 mAh	3.7V
ARE-L18-750000	750000	90600 mAh	3.7V
ARE-L18-755000	755000	91200 mAh	3.7V
ARE-L18-760000	760000	91800 mAh	3.7V
ARE-L18-765000	765000	92400 mAh	3.7V
ARE-L18-770000	770000	93000 mAh	3.7V
ARE-L18-775000	775000	93600 mAh	3.7V
ARE-L18-780000	780000	94200 mAh	3.7V
ARE-L18-785000	785000	94800 mAh	3.7V
ARE-L18-790000	790000	95400 mAh	3.7V
ARE-L18-795000	795000	96000 mAh	3.7V
ARE-L18-800000	800000	96600 mAh	3.7V
ARE-L18-805000	805000	97200 mAh	3.7V
ARE-L18-810000	810000	97800 mAh	3.7V
ARE-L18-815000	815000	98400 mAh	3.7V
ARE-L18-820000	820000	99000 mAh	3.7V
ARE-L18-825000	825000	99600 mAh	3.7V
ARE-L18-830000	830000	100200 mAh	3.7V
ARE-L18-835000	835000	100800 mAh	3.7V
ARE-L18-840000	840000	101400 mAh	3.7V
ARE-L18-845000	845000	102000 mAh	3.7V
ARE-L18-850000	850000	102600 mAh	3.7V
ARE-L18-855000	855000	103200 mAh	3.7V
ARE-L18-860000	860000	103800 mAh	3.7V
ARE-L18-865000	865000	104400 mAh	3.7V
ARE-L18-870000	870000	105000 mAh	3.7V
ARE-L18-875000	875000	105600 mAh	3.7V
ARE-L18-880000	880000	106200 mAh	3.7V
ARE-L18-885000	885000	106800 mAh	3.7V
ARE-L18-890000	890000	107400 mAh	3.7V
ARE-L18-895000	895000	108000 mAh	3.7V
ARE-L18-900000	900000	108600 mAh	3.7V
ARE-L18-905000	905000	109200 mAh	3.7V
ARE-L18-910000	910000	109800 mAh	3.7V
ARE-L18-915000	915000	110400 mAh	3.7V
ARE-L18-920000	920000	111000 mAh	3.7V
ARE-L18-925000	925000	111600 mAh	3.7V
ARE-L18-930000	930000	112200 mAh	3.7V
ARE-L18-935000	935000	112800 mAh	3.7V
ARE-L18-940000	940000	113400 mAh	3.7V
ARE-L18-945000	945000	114000 mAh	3.7V
ARE-L18-950000	950000	114600 mAh	3.7V
ARE-L18-955000	955000	115200 mAh	3.7V
ARE-L18-960000	960000	115800 mAh	3.7V
ARE-L18-965000	965000	116400 mAh	3.7V
ARE-L18-970000	970000	117000 mAh	3.7V
ARE-L18-975000	975000	117600 mAh	3.7V
ARE-L18-980000	980000	118200 mAh	3.7V
ARE-L18-985000	985000	118800 mAh	3.7V
ARE-L18-990000	990000	119400 mAh	3.7V
ARE-L18-995000	995000	120000 mAh	3.7V
ARE-L18-1000000	1000000	120600 mAh	3.7V



ALF-18 Battery Holder

The Fenix 18650 Li-ion battery can be used as a 21700 Li-ion when combined with this battery holder.

- PC + ABS materials - reliable and durable.
- Copper-plated positive contact - excellent performance in conductivity.
- Size: 2.41" x 0.85" / 61.2 x 21.5 mm.
- Weight: 0.22 oz / 6.1 g.

CHARGERS

Fenix provides different kinds of multifunctional chargers for various battery types. All of them feature readable charging indication and are guarded with multiple protection that effectively prevents overcharging and short circuit.



ARE-A2 Dual Channel Charger

The Fenix ARE-A2 is a dual-channel charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High-definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level.
- Compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries.
- AC and DC charging modes.
- To charge the battery: 4.2V/1.0A (Li-ion), 1.5V/1.0A (Ni-MH/Ni-Cd).
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W (Li-ion).
- Built-in short-circuit protection, over-current protection, over-voltage protection and reverse polarity protection.



ARE-A4 Multifunctional Charger

The Fenix ARE-A4 is a four-channel smart charger, which is compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries. High-definition LCD screen displays charging status and battery level clearly. In addition, a car charging mode offers high convenience for users.

- LCD display screen for charging and battery level.
- Compatible with different types of Li-ion and Ni-MH/Ni-Cd batteries.
- AC and DC charging modes.
- Rated output power: 6W (Ni-MH/Ni-Cd), 16.8W (Li-ion).
- To charge the battery: 4.2V/1.0A (Li-ion), 1.5V/1.0A (Ni-MH/Ni-Cd).
- Built-in short circuit protection, over-current protection, over-voltage protection and reverse polarity protection.



ARE-D1 Single Channel Multifunctional Charger

The Fenix ARE-D1 is a single channel smart charger that features charging and discharging functions. It is compatible with types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays the charging, discharging, and battery status clearly.

- Micro USB charging, and USB discharging.
- LCD screen for battery level, charging, and discharging status.
- 0.5/1.0/2.0A - three charging current for option.
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W(Li-ion).
- Short circuit protection, over-current protection, over-voltage protection, and reverse-polarity protection.



ARE-D2 Dual Channel Multifunctional Charger

The Fenix ARE-D2 is a dual channel smart charger that features charging and discharging functions. It is compatible with types of Li-ion and Ni-MH/Ni-Cd batteries. High definition LCD screen displays the charging, discharging, and battery status clearly.

- Micro USB charging, and USB discharging.
- LCD screen for battery level, charging, and discharging status.
- 0.5/1.0/2.0A - three charging current for option.
- Rated output power: 3W (Ni-MH/Ni-Cd), 8.4W (Li-ion).
- Short circuit protection, over-current protection, over-voltage protection and reverse-polarity protection.



ARE-X1 V2.0 Single Channel Smart Charger

The Fenix ARE-X1 V2.0 is a single channel smart charger that features USB Type-C charging and USB discharging function, designed for 18650, 21700 and 26650 batteries, and provides charging, discharging, and battery power detection.




AOT-S+/AOT-M/AOT-01 Traffic Wand

Fenix traffic wand can convert your flashlight into a glowing orange high-visibility wand. It's the best option for emergency situations and traffic control.

- German Bayer PC 2805 material.
- High compressive strength, impact resistance.
- High-temperature resistance and benign thermal stability.
- Easy to assemble and disassemble.

TACTICAL ACCESSORIES


The Fenix tactical accessories enhance your tactical flashlight's capabilities for any tactical situation.



AER-02 V2.0 Remote Pressure Switch

The Fenix AER-02 V2.0 remote pressure switch is specialized in tactical flashlights. The dual tail switches allow easy and fast operation of momentary-on or constant-on illumination (function may vary with flashlights).


- Tactical tail switch (round) for instant or constant activation.
- Noiseless (no click) pressure pad switch (30 mm long), which is more accurate in instant lighting, with a lifespan of 100,000 activations; capable of transmitting a current of 3A for a long period of time.
- User-friendly Velcro design for fast and convenient operation, included one hook and two loops.
- Cable is made from resilient PU material, with a length of 23 cm.
- Tail adapter is made from T6-grade aluminum, type III hard-anodized and an anti-abrasive finish.
- Tail adapter size: 25.4 mm Diameter x 31.5 mm Length.
- IP68-rated protection: 2 meters underwater.
- Applicable to Fenix 18650-powered flashlights with a single tail switch.



AER-03 V2.0 Remote Pressure Switch

The Fenix AER-03 V2.0 remote pressure switch is specialized in tactical flashlights. The dual tail switches allow easy and fast operation of momentary-on or constant-on illumination and output selection (function may vary with flashlights).


- Tactical Remote Pressure Switch.
- Tactical tail switch (round) for instant or constant activation.
- User-friendly Velcro design for fast and convenient operation, included one hook and two loops.
- Cable is made from resilient PU material, with a length of 23 cm.
- Tail adapter is made from T6-grade aluminum, type III hard-anodized and an anti-abrasive finish.
- Tail adapter size: 26.5 mm Diameter x 32 mm Length.
- IP68-rated protection: 2 meters underwater.
- Applicable to Fenix 18650-powered flashlights with dual tail switch.



AER-04 Remote Pressure Switch

The new Fenix AER-04 remote pressure switch is specialized in tactical flashlights using 21700 battery. Its tail adapter is made of A6061-T6 aluminum with type III hard-anodized and anti-abrasive finish. The dual tail switch panel includes a full-silent forward switch and a tape switch; allowing easy and fast operation of momentary-on or constant-on illumination. The innovative full-silent design with attached Velcro makes it very reliable and practical in your tactical missions or hunting.


- Tail adapter diameter: 1.14" / 29 mm.
- Applicable thread: Tr25.5 x 0.06" / 1.5 mm.
- Cable length: 9.00" / 230 mm.
- Full length: 13.39" / 340 mm.
- Weight: 1.48 oz / 42 g.



AER-05 Remote Pressure Switch

The Fenix AER-05 remote pressure switch is specialized in tactical flashlights with APF circuits. The dual tail switch panel includes a silent pressure pad switch and a round tactical switch; allowing easy and fast operation of momentary-on or constant-on illumination. The innovative full-silent design with attached Velcro makes it very reliable and practical in your tactical missions or hunting.


- Tail adapter diameter: 1.14" / 29 mm.
- Applicable thread: Tr25.5 x 0.06" / 1.5 mm.
- Cable length: 9.06" / 230 mm.
- Full length: 13.39" / 340 mm.
- Weight: 1.48 oz / 42 g.



AER-06s Remote Pressure Switch


The Fenix AER-06s is a revolutionary control device for weapon-mounted electronic accessories. Shared USB Type-C port with GL19R, AER-06s has successfully reinvented how you interface with your GL19R. With the design of a single electronic switch, this remote button is ergonomically inclined at a 45-degree angle, which can realize functions such as momentary on, constant on or strobe, and supports activation of the highest brightness of the flashlight. At the same time, it has an IPX6 protection level regardless of battle environments. MIL-STD-1913 rail adapter base is included as standard, and the M-Lok rail adapter base is also attached as an accessory. There are two types of bases for you to choose from.

- Size with MIL-STD-1913 rail adapter base: 1.50" x 1.34" x 1.10" / 38 x 34 x 28 mm.
- Size with M-Lok rail adapter base: 2.05" x 0.83" x 0.63" / 52 x 21 x 16 mm.
- Cable length: 7.87" / 200 mm.
- Weight with MIL-STD-1913 rail adapter base: 1.43 oz / 40.6 g.
- Weight with M-Lok rail adapter base: 1.11 oz / 31.4 g.




ALG-00 Rail Mount

The Fenix ALG-00 features the quick detachable Picatinny rail design which suits tactical firearms with fish oil Picatinny rails. The compatible flashlight diameter ranges from 22.5 to 26 mm, and a wrench is needed when clipping flashlights. Full-metal housing made of durable aircraft-grade aluminum, and premium type III hard-anodized anti-abrasive finish in all-black treatment without light reflection.



ALG-05 Remote Pressure Switch Mount

The Fenix ALG-05 remote pressure switch mount is specially designed for Fenix AER series tactical remote pressure switches. It perfectly fits the Picatinny rail by a simple push; featuring convenient assembly and disassembly, the mounting position can be flexibly adjusted. Designed specifically for tactical lighting, the remote pressure switch is within easy reach, so the flashlight can be momentarily switched on with a press of the button. The whole body of the mount is made of aluminum alloy with hard-anodized finish, and it is not reflective in matte black, which meets the needs of tactical concealment.



ALG-06 Remote Pressure Switch Mount

The Fenix ALG-06 tactical remote pressure switch mount can adapt the AER-02 V2.0/03 V2.0/04/05 remote pressure switch to the M-LOK rail, which is lightweight, and reliable.

- Lock fixation ensures no displacement.
- All-metal housing.
- Size: 2.72" x 0.93" x 0.40" / 69 x 23.7 x 10.2 mm.
- Weight: 0.87 oz / 24.7 g.



ALG-15 Rail Mount

The FenixALG-15 rail mount can fit a flashlight with a head diameter of less than 40 mm and a body diameter of 22.5 - 26 mm on the Picatinny rail (MIL-STD-1913), making quick disassembly and assembly possible by means of a screw nut.

- Fits multiple flashlights with different body diameters.
- Quick-release mounting.
- Compact and lightweight.
- Durable and wear-resistant material.
- Size: 2.95" x 1.22" x 1.18" / 75 x 31 x 30 mm.
- Weight: 1.36 oz / 38.6 g.



ALG-16 M-LOK Quick-release Rail Mount

The Fenix ALG-16 M-LOK quick-release rail mount can fit the flashlight with a head diameter of less than 40 mm and a body diameter of 22.5 - 26 mm on the M-LOK rail, making quick disassembly and assembly possible by hand.

- Fits multiple flashlights with different body diameters.
- Quick-release mounting.
- Compact and lightweight.
- Durable and wear-resistant material.
- Size: 2.04" x 1.66" x 1.19" / 51.7 x 42.1 x 30.1 mm.
- Weight: 1.88 oz / 53.3 g.



ALG-18 Rail Mount

The Fenix ALG-18 rail mount is a functional accessory that helps to perform tactical/hunting applications; which suits weapon barrels ranging from 18 - 23 mm. The compatible flashlight body diameter ranges from 24 - 26 mm with a light head diameter of less than 70 mm. Made of durable and high-strength aluminum, the easy operation effectively assists in tactical/hunting scenarios.

- Allows for quick assembly and disassembly of the gun barrels.
- Tool-free assembly and disassembly.
- Fits a variety of barrel dimensions.
- Size: 2.99" x 1.81" x 1.37" / 76 x 46 x 35 mm
- Weight: 3.10 oz / 88 g



ALP-10S/10L Flashlight Holster

The Fenix ALP-10S/10L is a holster that is specifically designed for packing and protecting flashlights. The use of anti-tear nylon material features excellent abrasion resistance. Three layers of different materials are used, with one-time hot pressing, which is stylish and durable; the back webbing is designed with a combination of Velcro and nickel-plated metal button, ensuring strong stability and quick-release ability. The holster can be perfectly matched with the belt, backpack, and more. In this way, the flashlight is fully protected in a variety of scenarios such as law enforcement, outdoor lighting, searching and rescuing, etc.

- The use of anti-tear nylon material features excellent abrasion resistance.
- Strong stability and quick-release ability.
- Stylish and durable.



T6 Automatic Retracting Tactical Pen

The Fenix T6 is a multifunctional self-defense tactical pen that is capable of illuminating, window-breaking and writing. Its maximum brightness reaches 80 lumens, and it supports Type-C charging. This tough pen features a zirconium bead that can break glass and assist in escape from danger. Inside every pen is an imported Schmidt pen cartridge for smooth, effortless writing. As you can expect, this rugged, high-performance writing tool is tough enough to provide you with a tactical advantage in emergency situations.

- Removable Schmidt 6.8CM metal pen refill for self-defense.
- Automatic retracting ink tip for smooth writing.
- Made of A6061-T6 aluminum.
- Premium type HAIII hard-anodized anti-abrasive finish.



NEW

ALR-01 Tactical Flashlight Ring

The Fenix ALR-01 tactical flashlight ring is designed for the multiple series of Fenix tactical flashlights that feature a body clip. The ring is easy to disassemble and assemble. It is made of high-strength nylon. The lightweight design and great portability provide users with a convenient and flexible flashlight operating experience to meet various holding needs.

Applicable products:

- TK series: TK16 V2.0/TK20R V2.0/TK20R UE/TK22 TAC/TK30
- PD series: PD36R PRO/PD36 TAC
- HT series: HT18/HT30R



NEW

ALP-20 Open-top Leather Holster

AThe Fenix LP-20 is a quick-pull leather case for duty flashlight. The whole is made of full-grain cowhide. The flashlight will not loosen after being inserted; it is a close-fitting concealed flashlight cover that is very suitable for casual clothes. Wear firmly, the flashlight will not shake even when running and under strenuous exercise. Body and thigh squeeze of the holster will not trigger the switch, and it is excellent to prevent accidental touch.

Applicable products:

- TK series: TK16 V2.0/TK20R V2.0/TK22R/TK30, etc.
- PD series: PD36R V2.0/PD40R V3.0, etc.

HEADBAND/FANNY PACK/STORAGE BAG

This is a series of accessories designed for outdoor activities such as running, all perfectly fit the body, and show a sense of sports fashion.



AFB-10 Sports Fanny Pack


The Fenix AFB-10 is a waterproof sports fanny pack with a large storage capacity. It features an adjustable waist strap and cross-shaped headphone hole, making running more enjoyable. In addition, a reflective logo ensures safer night running.

- Folded and tensile design, the storage capacity of the pack can be extended.
- The inside is a TPU waterproof layer, plus a waterproof zipper, all of which makes the pack resistant to water and sweat.
- Hidden hole for headphone usage.
- High-elastic adjustable belt for a closed and personal fit.
- Reflective Fenix logo.
- 4 colors for options: black, gray, blue, orange.



AFH-02/AFH-03 Sports Headband


- Made of elastic and air-permeable nylon.
- Sweat-channeling silicone lines.
- Safe reflective logo and lines.
- Hollow design - breathable and comfortable.



NEW

AFH-05 Widened Perforated Quick-adjust Headband


- Made of elastic and durable nylon.
- Single-handed operation with the new two-way SPORT Headband Fit System.
- 36 mm widened design - stable and reliable.
- Safe reflective logo and lines.
- Applicable headlamps: HL16, HL18R-T, HL32R-T, HM65R-T V2.0.



AFH-10 Sports Headband

The Fenix AFH-10 is a high-elastic quick-drying sports headband, made of air-permeable nylon fabric. The sweat-channeling silicone lines, reflective logo and lines make night activities safer.

- 70% nylon, 30% spandex - high-elastic and air-permeable.
- Sweat-channeling silicone lines.
- Safe reflective logo and lines.
- 4 colors for options: black, gray, blue, orange.




APB-20/APB-30 Headlamp Storage Bag

- Made of high-strength nylon cloth - lightweight and wear-resistant properties.
- Increased and large storage space, inner mesh cloth bag - enough for headlamp and battery storage.
- 50mm long lanyard.
- High-strength zipper.
- Applicable headlamps: HL10, HL12R, HL15, HL16, HL18R, HL23, HL26R, HM61R, HM65R, etc.
- 1000 times cycle use; 1-year free repair, lifetime limited warranty.

MOUNT/HOOK/LANYARD


The multifunctional mount and hook accessories provide more use patterns for all products with flexible assembly ways.



ALB-10 Quick-release Bicycle Mount


Utilizing a unique split-type design for quick release of flashlights, the Fenix ALB-10 bicycle mount can effectively reduce the amount of steps and the time needed for mounting. Featuring Fenix's solidity and compatibility with a wide range of flashlights, this mount will ensure your safety during your night riding.

- Split-type design for quick release.
- Fits flashlights with a diameter of 18 mm - 26 mm.
- Rotating 30-degree design adjusts to any locking angle.
- A high-quality rubber mat provides shock-resistant and slip-resistant grip without scratching the handlebar.
- Anti-aging, solid and able to withstand extended exposure to sunlight and rain.




ALB-20 Multipurpose Snap Hook

- Quick-release, stable wearing.
- Bottle opener.
- Straight screwdriver.
- Non-magnetizable.
- Size: 2.12" x 1.13" x 0.14"/ 53.8 x 28.6 x 3.5 mm.
- Weight: 0.32 oz / 9 g.
- Material: Titanium alloy TC4.




ALD-02 Helmet Attachment Hook Set

- Made of environmentally friendly PC material.
- Keep the headband firm on the helmet.
- Suitable for helmets of thickness less than 6 mm.
- Not for fully protective outdoor sports headlamps and headlamps with foam lining.



ALD-05 Flashlight Helmet Holder


- Anti-static rubber fixing strap, compatible with all types of helmets.
- Adjustable clamping caliber - suitable for flashlights with an outer body diameter of 20-28 mm.
- 360° adjustable angle.



ALD-08 Bicycle Light Helmet Holder

Applicable to BC21R V3.0、BC25R、BC26R、BC30 V2.0、BC15R

- The fitted cable ties are applicable to a variety of bicycle helmets.
- Push and pull for one-second assembly and disassembly.
- Nylon and fiberglass - high toughness, strength and durability.
- Weight: 0.39 oz / 11 g.
- Size: 2.87" x 2.20" x 0.55" / 73 x 56 x 14 mm.



ALD-10 Bicycle Light Holder with GoPro Interface

The holder is lightweight, and the bicycle light can be easily fixed with a single push. It is applicable to all Fenix bicycle lights.

- International GoPro interface.
- Easy assembly.
- Compact and lightweight.
- Stable and reliable.



ALG-03 V2.0 Headlamp Attachment

ALG-03 V2.0 headlamp attachment is specifically designed for headlamp fixation to outdoor or industrial work helmets. It enables fast and convenient attachment and detachment of headlamps to and from the helmet and allows adjustment of the lighting angle of the headlamps.

- Made of quality nylon - durable and eco-friendly.
- Included TESA adhesive tapes.



ALG-04 Helmet Clip

The Fenix ALG-04 headlamp clip is specifically designed for headlamp fixation to professional helmets with shroud. It enables easy and convenient attachment and detachment of the headlamp to and from the helmet with the slots design. Made of high-quality nylon material, it is durable and environmentally-friendly.

- Quick assembly.
- Applicable products: HL55, HL60R, HM60R, HM61R, HM65R, HM70R, HP30R V2.0.



ALL-01 Soft Flashlight Lanyard

ALL-01 is a flashlight lanyard made of nylon and silicone sleeves. The length of the nylon cord and the silicone sleeves can be adjusted as needed. This flashlight lanyard is very comfortable to the hands and features non-slip as well.

- Applicable products: SD11, SD20, TK47UE, TK47, TK72R, TK75, RC40.
- Size: 0.35" Tube diameter x 9.25" Length (9 x 235 mm).
- Weight: 0.42 oz / 12 g.



ALW-01 Wrist Flashlight Holder

The Fenix ALW-01 wrist flashlight holder is a wearable helper that is designed to hold a small flashlight with a body clip on your arm or your wrist. Constructed from durable PC material, the 360° adjustable flashlight holder is flexible for perfect hands-free illumination. The wrist strap is made of durable Nylon yarn, which is wear-resistant and comfortable to wear, and the adjustable range of the wrist strap is 140 - 200 mm. This wrist flashlight holder can be freely worn on the left or right hand.

- Body size: 2.09" x 1.77" x 0.83" / 53 x 45 x 21.2 mm (Length x Width x Thickness).
- Wrist strap size: 9.06 x 1.57" / 230 (±5) x 40 (±1) mm (Length x Width).
- Adjustable range of the wrist strap: 140 - 200 mm.
- Body weight: 0.56 oz / 16 g, wrist weight: 0.32 oz / 9 g; 0.88 oz / 25 g in total.



FENIX ACCESSORIES COMPATIBILITY GUIDE

MODEL	Battery			Battery Holder	Diffuser Tip		Filter Adapter		Traffic Wand			Rail Mount				Remote Switch			
	ARB			ALF	AOD		AOF		AOT			ALG				AER			
	L16 (16340)	L18 (18650)	L21 (21700)	18	S V2.0	M	S+V2.0	L	S+	M	01	00	15	16	18	02 V2.0	03 V2.0	04	05
Flashlight - E Series																			
E01 V2.0																			
E03R V2.0																			
E05R																			
E09R																			
E12 V2.0																			
E18R V2.0																			
E20 V2.0																			
E28R V2.0																			
E35R																			
E-CP																			
E-STAR																			
Flashlight - LD Series																			
LD02 V2.0																			
LD12R																			
LD22 V2.0																			
LD30R																			
Flashlight - PD Series																			
PD25R																			
PD32R																			
PD35 V3.0																			
PD35R																			
PD36R V2.0																			
PD36R Pro																			
PD36 TAC																			
PD40R V3.0																			
Flashlight - TK Series																			
TK11R																			
TK16 V2.0																			
TK20R V2.0																			
TK20R UE																			
TK22 TAC																			
TK22R																			
TK26R																			
TK30																			
TK35UE V2.0																			
Flashlight - HT Series																			
HT18																			
HT18R																			
HT30R																			
HT32																			
Flashlight - LR Series																			
LR35R																			
LR40R V2.0																			
LR50R																			
LR60R																			
LR80R																			
Flashlight - WF Series																			
WF05E																			

Remote Switch	Flashlight Holster				Tactical Flashlight Ring	Headlamp Storage Bag		Headlamp Attachment		Headband				Bicycle Mount	Flashlight Helmet Holder	Bicycle Light Helmet Holde	Bicycle Light Helmet Holder	Wrist Flashlight Holder	Lanyard	MODEL
AER	ALP				ALR	APB		ALG		AFH				ALB	ALD	ALD	ALD	ALW	ALL	
06s	10s	10L	20		01	20	30	03 V2.0	04	02	03	10	05	10	05	08	10	01	01	
Flashlight - E Series																				E01 V2.0 E03R V2.0 E05R E09R E12 V2.0 E18R V2.0 E20 V2.0 E28R V2.0 E35R E-CP E-STAR
Flashlight - LD Series																				LD02 V2.0 LD12R LD22 V2.0 LD30R
Flashlight - PD Series																				PD25R PD32R PD35 V3.0 PD35R PD36R V2.0 PD36R Pro PD36 TAC PD40R V3.0
Flashlight - TK Series																				TK11R TK16 V2.0 TK20R V2.0 TK20R UE TK22 TAC TK22R TK26R TK30 TK35UE V2.0
Flashlight - HT Series																				HT18 HT18R HT30R HT32
Flashlight - LR Series																				LR35R LR40R V2.0 LR50R LR60R LR80R
Flashlight - WF Series																				WF05E

FENIX ACCESSORIES COMPATIBILITY GUIDE

MODEL	Battery			Battery Holder	Diffuser Tip		Filter Adapter		Traffic Wand			Rail Mount				Remote Switch				
	ARB			ALF	AOD		AOF		AOT			ALG				AER				
	L16 (16340)	L18 (18650)	L21 (21700)	18	S V2.0	M	S+V2.0	L	S+	M	01	00	15	16	18	02 V2.0	03 V2.0	04	05	
WF11E																				
WF26R																				
WF30RE																				
Flashlight - WT Series																				
WT16R																				
WT25R																				
Tactical - GL Series																				
GL06																				
GL19R																				
GL22																				
GL22R																				
Headlamp - HL Series																				
HL16																				
HL18R-T																				
HL32R-T																				
HL40R																				
Headlamp - HM Series																				
HM23																				
HM50R V2.0																				
HM60R																				
HM61R V2.0																				
HM62-T																				
HM65R																				
HM65R-T V2.0																				
HM70R																				
HM71R																				
HM75R																				
Headlamp - HP Series																				
HP16R																				
HP25R V2.0																				
HP35R																				
HP30R V2.0																				
Headlamp - WH Series																				
WH23R																				
Bicycle Light - BC Series																				
BC05R V2.0																				
BC15R																				
BC21R V3.0																				
BC25R																				
BC26R																				
BC30 V2.0																				
Camping Lantern - CL Series																				
CL20R																				
CL22R																				
CL26R Pro																				
CL28R																				
CL30R																				

Remote Switch	Flashlight Holster			Tactical Flashlight Ring	Headlamp Storage Bag		Headlamp Attachment		Headband				Bicycle Mount	Flashlight Helmet Holder	Bicycle Light Helmet Holde	Bicycle Light Helmet Holder	Wrist Flashlight Holder	Lanyard	MODEL
AER	ALP			ALR	APB		ALG		AFH				ALB	ALD	ALD	ALD	ALW	ALL	
06s	10s	10L	20	01	20	30	03 V2.0	04	02	03	10	05	10	05	08	10	01	01	
																			WF11E
																			WF26R
																			WF30RE
Flashlight - WT Series																			
																			WT16R
																			WT25R
Tactical - GL Series																			
																			GL06
																			GL19R
																			GL22
																			GL22R
Headlamp - HL Series																			
																			HL16
																			HL18R-T
																			HL32R-T
																			HL40R
Headlamp - HM Series																			
																			HM23
																			HM50R V2.0
																			HM60R
																			HM61R V2.0
																			HM62-T
																			HM65R
																			HM65R-T V2.0
																			HM70R
																			HM71R
																			HM75R
Headlamp - HP Series																			
																			HP16R
																			HP25R V2.0
																			HP35R
																			HP30R V2.0
Headlamp - WH Series																			
																			WH23R
Bicycle Light - BC Series																			
																			BC05R V2.0
																			BC15R
																			BC21R V3.0
																			BC25R
																			BC26R
																			BC30 V2.0
Camping Lantern - CL Series																			
																			CL20R
																			CL22R
																			CL26R Pro
																			CL28R
																			CL30R

FENIX PRODUCTS SPECIFICATION CHART

Model		Output	Runtime		Distance	
E01 V2.0	High	100 lm	Alkaline Battery 50 min	Ni-MH Battery 50 min	35 m	
	Med	25 lm	4 h 50 min	4 h 30 min	19 m	
	Low	5 lm	25 h	23 h	9 m	
E03R V2.0	High	500 lm	1 h 20 min		90 m	
	Med	150 lm	2 h		50 m	
	Low	30 lm	6 h 35 min		20 m	
	Eco	5 lm	30 h		9 m	
	Red	5 lm	/		/	
	Red Flash	5 lm	/		/	
	Breathing Light	1 lm	/		/	
E05R	Burst	400 lm	/		64 m	
	High	150 lm	55 min		40 m	
	Med	25 lm	5 h		17 m	
	Low	3 lm	30 h		8 m	
E12 V2.0	High	160 lm	1 h		68 m	
	Med	30 lm	13 h		28 m	
	Low	5 lm	70 h		12 m	
E18R V2.0	Turbo	1200 lm	30 min		146 m	
	High	350 lm	1 h 20 min		81 m	
	Med	150 lm	2 h 30 min		53 m	
	Low	30 lm	15 h		23 m	
	Moonlight	1 lm	200 h		9 m	
	Strobe	1200 lm	/		/	
E20 V2.0			Alkaline Battery	Ni-MH Battery		
	High	350 lm	3 h 45 min	1 h 30 min	126 m	
	Med	150 lm	11 h 15 min	5 h 30 min	76 m	
	Low	30 lm	93 h 35 min	34 h 30 min	35 m	
	Eco	5 lm	200 h	140 h	15 m	
E28R V2.0	General Mode	Turbo	1700 lm	2 h 10 min		273 m
		High	600 lm	2 h 50 min		164 m
		Med	150 lm	17 h 15 min		80 m
		Low	50 lm	36 h 50 min		45 m
		Eco	5 lm	260 h		15 m
	Flash Mode	Strobe	1700 lm	/		/
	Warning Light	1 lm	/		/	
E35R	Turbo	3100 lm	2 h 30 min		260 m	
	High	1000 lm	3 h 40 min		138 m	
	Med	350 lm	9 h 20 min		80 m	
	Low	150 lm	21 h 20 min		54 m	
	Eco	30 lm	69 h		25 m	
	Strobe	3100 lm	/		/	
E-STAR	Turbo	100 lm	/		40 m	
	High	20 lm	10 h		18 m	
	Med	3 lm	60 h/∞		7 m	
	Low	1 lm	120 h/∞		4 m	

MODEL		OUTPUT		RUNTIME		DISTANCE	
E-CP	Turbo	1600 lm		2 h 30 min		222 m	
	High	350 lm		8 h 30 min		105 m	
	Med	150 lm		20 h		69 m	
	Low	30 lm		84 h		33 m	
	Eco	3 lm		504 h		10 m	
	Strobe	1600 lm		/		/	
LD02 V2.0	High	70 lm	Alkaline Battery	Ni-MH Battery	48 m		
			40 min	45 min			
	Med	25 lm	2 h 40 min	2 h 55 min	27 m		
	Low	1 lm	75 h	45 h	6 m		
	UV Light	200mW	4 h	3 h	/		
LD12R	Main light	High	600 lm		1 h 20 min		186 m
		Med	150 lm		3 h 20 min		90 m
		Low	30 lm		16 h 20 min		40 m
		Moonlight	1 lm		110 h		9 m
	Side light	High	100 lm		4 h		12 m
		Med	30 lm		14 h 30 min		7 m
		Low	5 lm		53 h		3 m
		LD22 V2.0	General Mode	Turbo	AA	ARB-L14-1100U	214 m
/	800 lm				/	54 min	
High	350 lm			1 h 15 min	1 h 40 min	142 m	
Med	100 lm			5 h 50 min	7 h	76 m	
Low	30 lm			19 h 45 min	22 h 20 min	43 m	
Eco	2 lm		190 h	220 h	11 m		
Flash Mode	Strobe		350 lm	800 lm	/	/	/
	SOS		100 lm	100 lm	/	/	/
LD30R	General Mode	Turbo	1700 lm		2 h 10 min		267 m
		High	600 lm		2 h 50 min		161 m
		Med	150 lm		14 h 40 min		80 m
		Low	50 lm		37 h 25 min		45 m
		Moonlight	1 lm		750 h		8 m
	Flash Mode	Strobe	1700 lm		/		/
		SOS	50 lm		/		/
PD25R	General Mode	Turbo	800 lm		44 min		250 m
		High	350 lm		1 h 30 min		164 m
		Med	150 lm		2 h 50 min		107 m
		Low	30 lm		16 h		48 m
		Eco	5 lm		70 h		19 m
	Strobe	800 lm		/		/	
PD32R	Turbo	1400 lm		2 h 30 min		325 m	
	High	350 lm		4 h		160 m	
	Med	100 lm		15 h		86 m	
	Low	20 lm		80 h		41 m	

MODEL		OUTPUT	RUNTIME	DISTANCE	
PD35 V3.0	Turbo	1700 lm	1 h 25 min	357 m	
	High	600 lm	2 h 35 min	216 m	
	Med	150 lm	8 h 30 min	109 m	
	Low	50 lm	26 h 25 min	63 m	
	Eco	5 lm	230 h	20 m	
	Strobe	1700 lm	/	/	
PD35R	Turbo	1700 lm	2 h 15 min	353 m	
	High	1000 lm	2 h 55 min	278 m	
	Med	350 lm	4 h 45 min	163 m	
	Low	50 lm	38 h	60 m	
	Eco	10 lm	100 h	26 m	
	Strobe	1700 lm	/	/	
PD36R V2.0	Turbo	1700 lm	3 h 30 min	396 m	
	High	800 lm	4 h 15 min	268 m	
	Med	350 lm	7 h 45 min	177 m	
	Low	50 lm	50 h	67 m	
	Eco	5 lm	482 h	19 m	
	Strobe	1700 lm	/	/	
PD36R Pro	Turbo	2800 lm	3 h 30 min	380 m	
	High	1000 lm	3 h 55 min	225 m	
	Med	350 lm	8 h 15 min	130 m	
	Low	150 lm	19 h	90 m	
	Eco	30 lm	42 h	40 m	
	Strobe	2500 lm	/	/	
PD36 TAC	Tactical Mode	High	2000 lm	3 h 10 min	225 m
		Strobe	2000 lm	/	/
	Duty Mode	Turbo	3000 lm	1 h 30 min	274 m
		High	1000 lm	3 h 15 min	160 m
		Med	350 lm	10 h 10 min	92 m
		Low	150 lm	18 h 45 min	59 m
		Eco	30 lm	43 h 10 min	25 m
		Strobe	2000 lm	/	/
PD40R V3.0	Turbo	3000 lm	2 h 40 min	500 m	
	High	1000 lm	3 h 10 min	300 m	
	Med	350 lm	8 h 30 min	175 m	
	Low	30 lm	89 h	50 m	
	SOS	350 lm	/	/	
	Strobe	3000 lm	/	/	
TK11R	High	1600 lm	1 h 50 min	420 m	
	Med	350 lm	4 h 10 min	200 m	
	Low	30 lm	25 h 30 min	60 m	
	Strobe	1600 lm	/	/	

MODEL		OUTPUT	RUNTIME	DISTANCE	
TK16 V2.0	Turbo	3100 lm	2 h 40 min	380 m	
	High	1000 lm	2 h 50 min	220 m	
	Med	350 lm	8 h 20 min	125 m	
	Low	150 lm	19 h 10 min	80 m	
	Eco	30 lm	43 h 20 min	40 m	
	Strobe	3100 lm	/	/	
TK20R V2.0	Turbo	3000 lm	2 h 50 min	475 m	
	High	1000 lm	3 h 10 min	265 m	
	Med	350 lm	7 h	150 m	
	Low	150 lm	21 h 20 min	100 m	
	Eco	30 lm	48 h	45 m	
	Strobe	3000 lm	/	/	
TK20R UE	Tactical Mode	Turbo	2800 lm	3 h	465 m
		Strobe	2800 lm	/	465 m
	Duty Mode	Turbo	2800 lm	3 h	465 m
		High	1000 lm	3 h 15 min	465 m
		Med	350 lm	9 h	465 m
		Low	30 lm	40 h	465 m
	Lock/OFF Mode		/	/	/
TK22 TAC	Tactical Mode	Turbo	2800 lm	3 h	540 m
		Strobe	2500 lm	/	/
	Duty Mode	High	1000 lm	4 h	315 m
		Med	350 lm	8 h 10 min	188 m
		Low	150 lm	18 h 30 min	120 m
		Eco	30 lm	49 h 30 min	55 m
		Strobe	2500 lm	/	/
TK22R	Tactical Mode	Turbo	3200 lm	2 h 15 min	480 m
		Strobe	3200 lm	/	/
	Duty Mode	Turbo	3200 lm	2 h 15 min	480 m
		High	1000 lm	2 h 35 min	265 m
		Med	350 lm	7 h 45 min	155 m
		Low	30 lm	50 h	45 m
	Lock/OFF Mode		/	/	/
TK26R	Turbo	1500 lm	1 h 15 min	350 m	
	High	350 lm	4 h 27 min	170 m	
	Med	150 lm	10 h 18 min	110 m	
	Low	10 lm	100 h	30 m	
	Strobe	1500 lm	/	/	
	Red Light	150 lm	4 h 10 min	30 m	
	Green Light	200 lm	5 h	40 m	
TK30	High	500 lm	3 h	1200 m	
	Low	100 lm	6 h	600 m	
	Strobe	500 lm	/	/	

FENIX PRODUCTS SPECIFICATION CHART

MODEL		OUTPUT		RUNTIME		DISTANCE	
TK35UE V2.0	Tactical Mode	Tactical	3500 lm	1 h 50 min		320 m	
		Strobe	3500 lm	/		/	
	Duty Mode	Turbo	5000 lm	1 h 40 min		400 m	
		High	2000 lm	2 h		250 m	
		Med	800 lm	4 h		160 m	
		Low	350 lm	13 h 40 min		100 m	
		Eco	30 lm	85 h		32 m	
		Strobe	3500 lm	/		/	
HT18		21700 lm	18650 lm	21700	18650	21700	18650
	Turbo	1500 lm	1100 lm	1 h 40 min	1 h 40 min	925 m	805 m
	High	500 lm	500 lm	4 h 15 min	2 h 50 min	570 m	570 m
	Med	150 lm	150 lm	20 h 15 min	14 h 10 min	300 m	300 m
	Low	30 lm	30 lm	61 h	53 h	160 m	160 m
HT18R	Strobe	1500 lm	1100 lm	/	/	/	/
	Turbo	2800 lm	1 h 40 min		1100 m		
	High	1000 lm	2 h 15 min		670 m		
	Med	350 lm	6 h 30 min		400 m		
	Low	30 lm	42 h		100 m		
	Strobe	2600 lm	/		/		
HT30R	SOS	150 lm	40 h		200 m		
	High	500 lm	2 h 20 min		1500 m		
	Low	100 lm	7 h 15 min		630 m		
HT32	Strobe	500 lm	/		/		
	White Light Mode	Turbo	2500 lm	1 h 50 min		640 m	
		High	1000 lm	2 h 30 min		420 m	
		Med	350 lm	8 h		250 m	
		Low	50 lm	29 h		100 m	
		Strobe	2500 lm	/		/	
	Red Light Mode Green Light Mode	High	400 lm	3 h 15 min		120 m	
		Low	150 lm	4 h 50 min		70 m	
		High	1400 lm	2 h 30 min		210 m	
Low		350 lm	6 h		100 m		
LR35R	Turbo	10000 lm	1 h 25 min		500 m		
	High	3000 lm	1 h 35 min		270 m		
	Med	1200 lm	3 h 15 min		170 m		
	Low	450 lm	8 h 20 min		105 m		
	Eco	50 lm	80 h		30 m		
	Strobe	10000 lm	/		/		
LR50R	General Mode	Turbo	12000 lm	1 h 50 min		950 m	
		High II	6000 lm	2 h 20 min		690 m	
		High I	3000 lm	2 h 40 min		480 m	
		Med	1000 lm	7 h 40 min		280 m	
		Low	350 lm	24 h		165 m	
		Eco	50 lm	58 h		70 m	
	Functional Mode	Turbo	12000 lm	1 h 50 min		950 m	
		Strobe	6000 lm	/		/	
		SOS	350 lm	/		/	

MODEL		OUTPUT		RUNTIME		DISTANCE	
LR40R V2.0	Spotlight Mode	High	3000 lm	3 h		886 m	
		Med	1500 lm	3 h 40 min		650 m	
		Low	500 lm	14 h 10 min		380 m	
		Eco	10 lm	177 h		60 m	
		Turbo	12000 lm	2 h 30 min		340 m	
	Floodlight Mode	High	8000 lm	2 h 30 min		280 m	
		Med	3000 lm	3 h		170 m	
		Low	1000 lm	11 h		100 m	
		Eco	100 lm	50 h		30 m	
		Turbo	15000 lm	2 h 30 min		900 m	
	Spot-and-floodlight Mode	High	10000 lm	2 h 30 min		780 m	
		Med	5000 lm	2 h 40 min		591 m	
LR60R	Flash Mode	Low	1500 lm	6 h		387 m	
		Eco	300 lm	25 h		250 m	
		Strobe	15000 lm	/		/	
		SOS	500 lm	/		/	
		Turbo	21000 lm	1 h 50 min		1085 m	
	Search Mode (Long Range Searching)	High	3000 lm	3 h 45 min		1000 m	
		Med	1000 lm	10 h 40 min		607 m	
		Low	300 lm	24 h 20 min		330 m	
		Eco	50 lm	113 h		132 m	
		Turbo	15000 lm	2 h 10 min		352 m	
	Camp Mode (Large Area Lighting)	Med	2000 lm	5 h 25 min		126 m	
		High	6000 lm	3 h		218 m	
LR80R	Spotlight Mode	Turbo	15000 lm	2 h 10 min		352 m	
		SOS	300 lm	/		/	
		Strobe	9000 lm	/		/	
		Med	2000 lm	5 h 25 min		126 m	
		High	6000 lm	3 h		218 m	
	Floodlight Mode	Turbo	15000 lm	2 h 10 min		352 m	
		SOS	300 lm	/		/	
		Strobe	9000 lm	/		/	
		Med	2000 lm	5 h 25 min		126 m	
		High	6000 lm	3 h		218 m	
WF05E	High-Output Mode	Turbo	18000 lm	2 h		1130 m	
		High	12000 lm	2 h 15 min		920 m	
		Med	6000 lm	2 h 50 min		650 m	
		Low	3000 lm	5 h 10 min		465 m	
		High	1000 lm	15 h 40 min		265 m	
	Low-Output Mode	Med	450 lm	39 h		175 m	
		Low	150 lm	92 h		105 m	
		Eco	50 lm	300 h		50 m	
		Strobe	6000 lm	/		/	
		SOS	150 lm	/		/	
WF11E	General Mode	High	85 lm	11.5 h		54 m	
		Med	30 lm	35 h		29 m	
		Low	10 lm	80 h		18 m	
WF11E	General Mode	High	200 lm	10 h		185 m	
		Med	100 lm	29.5 h		141 m	
		Low	30 lm	70 h		81 m	

MODEL		OUTPUT	RUNTIME		DISTANCE		
WF30RE		High	280 lm	6 h 50 min		170 m	
		Med	120 lm	15 h 40 min		120 m	
		Low	30 lm	120 h		58 m	
		Strobe	280 lm	/		/	
WF26R	General Mode	Turbo	3000 lm	2 h 41 min		450 m	
		High	1000 lm	2 h 47 min		264 m	
		Med	350 lm	8 h 56 min		155 m	
		Eco	30 lm	44 h 8 min		47 m	
	Flash Mode	Strobe	3000 lm	/		/	
		SOS	100 lm	/		/	
WT16R	Spotlight Mode	High	300 lm	3 h 50 min		115m	
		Med	100 lm	9 h 20 min		65m	
		Low	30 lm	30 h		35m	
	Floodlight Mode	High	300 lm	3 h 50 min		23m	
		Low	100 lm	9 h 20 min		14m	
		Yellow Flash	10 lm	/		/	
WT25R	General Mode	Turbo	1000 lm	3 h 40 min		220 m	
		High	400 lm	4 h 50 min		145 m	
		Med	150 lm	11 h		85 m	
		Low	50 lm	29 h		50 m	
	Flash Mode	Strobe	1000 lm	/		/	
		SOS	50 lm	/		/	
HL16	White Light	Turbo	450 lm	3 h		104 m	
		High	150 lm	8 h		58 m	
		Med	50 lm	27 h		32 m	
		Low	5 lm	100 h		10 m	
	Red Light	SOS	5 lm	100 h		6 m	
		SOS	5 lm	200 h		6 m	
HL18R-T	Spotlight	High	500 lm	Li-polymer	AAA	82 m	
			3 h	4 h			
		Med	200 lm	8 h	11 h	54 m	
	Floodlight	Low	70 lm	20 h	20 h	35 m	
		Low	30 lm	30 h	43 h	12 m	
		SOS	4 lm	300 h	300 h	5 m	
HL32R-T	General Mode	High	800 lm	3 h		132 m	
		Med	200 lm	8 h		66 m	
		Low	70 lm	20 h		38 m	
	Functional Mode	High	200 lm	8 h		30 m	
		Med	70 lm	20 h		17 m	
		Low	5 lm	150 h		5 m	
		SOS	5 lm	300 h		5 m	
HL40R	General Mode	High	300 lm	4.5 h		Spotlight	Floodlight
			96 m	29 m			
		Med	130 lm	11 h		64 m	19 m
		Low	70 lm	22 h		46 m	14 m
	Functional Mode	Eco	30 lm	50 h		30 m	9 m
		Reading	4 lm	200 h		10 m	4 m
		SOS	30 lm	100 h		30 m	9 m
Burst	600 lm	1 h 20 min		147 m	43 m		

FENIX PRODUCTS SPECIFICATION CHART

MODEL			OUTPUT	RUNTIME		DISTANCE
HM70R	General Mode	Turbo	1600 lm	4 h		186 m
		High	500 lm	6 h		105 m
		Med	150 lm	30 h		53 m
		Low	30 lm	100 h		26 m
	Functional Mode	Red Light	5 lm	400 h		5 m
		Med	70 lm	48 h		16 m
		High	400 lm	8 h		38 m
		Red Flash	5 lm	800 h		5 m
HM71R	Spotlight Mode	Turbo	2700 lm	3 h		230 m
		High	800 lm	5 h		104 m
		Med	200 lm	16 h		52 m
		Low	50 lm	48 h		27 m
	Floodlight Mode	High	500 lm	8 h		47 m
		Med	200 lm	16 h		30 m
		Low	50 lm	48 h		14 m
		Read	5 lm	400 h		5 m
HM75R	Spotlight Mode	Turbo	1600 lm	/		200 m
		High	800 lm	/		132 m
		Med	2000 lm	/		66 m
		Low	50 lm	/		33 m
	Floodlight Mode	Turbo	1000 lm	/		66 m
		High	400 lm	/		43 m
		Med	150 lm	/		26 m
		Low	5 lm	/		5 m
	Red Light Mode	High	120 lm	/		20 m
		Med	30 lm	/		10 m
		Low	5 lm	/		3 m
		Flash	5 lm	/		/
HP16R	General Mode	Turbo	1250 lm	4 h		225 m
		High	400 lm	8 h		149 m
		Med	150 lm	12 h		88 m
		Low	50 lm	36 h		52 m
	Functional Mode	High	400 lm	8 h		48 m
		Med	150 lm	12 h		30 m
		Low	5 lm	300 h		6 m
		Red	5 lm	300 h		6 m
HP25R V2.0	General Mode	Turbo	1600 lm	In water 2 h	In air 6 h	290 m
		High	1000 lm	4 h	7 h	228 m
		Med	400 lm	8 h	8 h	140 m
		Low	150 lm	24 h	24 h	83 m
		Eco	50 lm	56 h	56 h	59 m
		High	400 lm	8 h	8 h	50 m
	Functional Mode	Med	150 lm	24 h	24 h	30 m
		Low	5 lm	400 h	400 h	8 m
		Red	5 lm	400 h	400 h	6 m
		SOS	5 lm	800 h	800 h	6 m

MODEL		OUTPUT	RUNTIME	DISTANCE	
HP30R V2.0	Spotlight Mode	Turbo	2000 lm	6 h	251 m
		High	800 lm	12 h	156 m
		Med	200 lm	34 h	78 m
		Low	50 lm	120 h	42 m
	Floodlight Mode	High	1000 lm	10 h	78 m
		Med	200 lm	34 h	34 m
		Low	50 lm	120 h	17 m
	Spot & floodlight Mode	Turbo	3000 lm	5 h	270 m
		High	1800 lm	6 h	177 m
		Med	400 lm	17 h	85 m
		Low	100 lm	60 h	45 m
	HP35R	Spotlight Mode	Turbo	3000 lm	5 h
High			1000 lm	8 h	
Med			200 lm	30 h	
Low			50 lm	120 h	
Floodlight Mode		Turbo	1200 lm	7 h	
		High	200 lm	30 h	
		Med	50 lm	120 h	
		Low	5 lm	1000 h	
Spot-and-floodlight Mode		Turbo	4000 lm	4 h	
		High	1200 lm	7 h	
		Med	250 lm	24 h	
		Low	55 lm	100 h	
Red light Mode		Flash	5 lm	480 h	
		Low	5 lm	800 h	
		Med	20 lm	100 h	
WH23R	Spotlight Mode	High	300 lm	6 h 19 min	84 m
		Med	120 lm	9 h 32 min	53 m
		Low	30 lm	35 h 57 min	26 m
	Floodlight Mode	High	300 lm	6 h 19 min	35 m
		Med	70 lm	15 h 36 min	17 m
		Low	5 lm	150 h	5 m
	Spotlight+ floodlight	Turbo	600 lm	3 h 49 min	100 m
BC05R V2.0	High Flash(Fast)	15 lm	35 h	50 m	
	High Flash(Slow)	15 lm	25 h		
	High	15 lm	4.5 h		
	Low Flash(Fast)	5 lm	120 h		
	Low Flash(Slow)	5 lm	80 h		
	Low	5 lm	16 h		
BC15R	High	400 lm	3 h 40 min	78 m	
	Med	150 lm	10 h 30 min	47 m	
	Low	50 lm	31 h 30 min	28 m	
	Flash	400/50 lm	/	/	

MODEL		OUTPUT	RUNTIME		DISTANCE
BC21R V3.0	General Mode	Turbo	1200 lm	2 h 12 min	142 m
		High	400 lm	6 h 30 min	80 m
		Med	150 lm	11 h	49 m
	Functional Mode	Low	50 lm	33 h	28 m
		Flash	400 lm	/	/
BC25R	General Mode	Turbo	600 lm	2 h	106 m
		High	350 lm	7 h	79 m
		Med	150 lm	15 h	53 m
		Low	50 lm	36 h	32 m
		Flash	150 lm	/	/
BC26R	General Mode	Turbo	1600 lm	3 h 30 min	169 m
		High	600 lm	9 h 30 min	101 m
		Med	200 lm	18 h	57 m
		Low	50 lm	65 h	28 m
		Flash	600 lm	/	/
BC30 V2.0	General Mode	Burst	2200 lm	/	187 m
		High	1500 lm	2.3 h	155 m
		Med	600 lm	6 h	96 m
		Low	200 lm	16 h	56 m
		EDC/Eco	50 lm	50 h	28 m
		Flash	600/50 lm	/	/
CL20R	General Mode	Turbo	300 lm	6 h	15 m (Max)
		High	130 lm	12 h	
		Med	40 lm	20 h	
	Red Mode	Low	1 lm	200 h	
		Flash	1.5 lm	/	
		Constant on	1.5 lm	100 h	
CL26R PRO	General Mode	High	500 lm	10 h	15 m
		Med	200 lm	13 h	
		Low	50 lm	40 h	
		Front	25 lm	67 h	
		Down 1	5 lm	408 h	
		Down 2	50 lm	58 h	
		Down 3	150 lm	15 h	
		Red Light	3 lm	125 h	
		Red Flash	3 lm	240 h	
CL28R	White Light	High	2000 lm	9 h	58 m
		Med	1000 lm	10 h	42 m
		Low	10 lm	360 h	4 m
	Red Light	Red Constant-on	9 lm	170 h	4.5 m
		Red Flash	9 lm	340 h	/

MODEL		OUTPUT		RUNTIME		DISTANCE		
CL30R		Turbo	650 lm	2600mAh 4 h 30 min	3500mAh 6 h	35 m		
		High	350 lm	9 h	12 h			
		Med	100 lm	38 h	51 h			
		Low	50 lm	70 h	93 h			
		Eco	10 lm	300 h	400 h			
		Flash	100 lm	70 h	93 h			
GL06/ GL06-365	White Light	ARB-L16-700UP	600 lm	50 min		140 m		
		CR123A	400 lm	1 h 30 min		/		
		Strobe	/	/		/		
GL19R		Turbo	1200 lm	1 h		210 m		
		High	350 lm	2 h		110 m		
		Strobe	1200 lm	/		/		
GL22		White Light	ARB-L16-700UP 750 lm	CR123A 500 lm	ARB-L16-700UP 35 min	CR123A 1 h	ARB-L16-700UP 180 m	CR123A 140 m
		Red Laser	/	/	17 h	24 h	/	/
		Strobe	750 lm	500 lm	/	/	/	/
GL22R		White Light	1200 lm	70 min			230 m	
		Whie Light and Laser	1200 lm	60 min			230 m	
		Laser	5 mW 530 nm	1000 min			/	
		Lock	/	/			/	

CUSTOMER SERVICE

Fenix Product Warranty Terms

15 Days Free Replacement

15 days free replacement: Fenix will replace a new product within 15 days of purchase for any manufacturing defects if problems come into being in normal use; We will replace it with the same model. If the model has been discontinued, customers will receive a product with a similar or improved model.

5 Years Free Repair

5 years free repair: Fenix will offer free repair within 5 years for lights from the date of purchase if a problem develops with normal use. Different warranty periods for different products:

Product Type	Warranty
Flashlights, tactical lights, headlamps, bicycle lights, camping lanterns (included rechargeable lights but not built-in battery)	5 years battery for 1 year
Flashlights, tactical lights, headlamps, bicycle lights, camping lanterns (with built-in battery)	2 years (battery included)
Rechargeable batteries, chargers, bike mount, and remote pressure switch	1 year

Limited Lifetime Warranty

Limited lifetime warranty: For lights past the free repair warranty period, we provide lifetime repairs but will charge for parts. The distributor will notify the customer of the cost of the part before repair.

Extended Warranty Service

An extra 6-month warranty period is obtained once you have successfully registered on the official website for Fenixlight Limited (www.fenixlight.com), which only applies to flashlights, tactical lights, headlamps, bike lights and camping lanterns.

Warranty Certificate

Customers requesting after-sales service from Fenix distributors or dealers, should present their completed Fenix Warranty Card, purchase invoice or receipt. The distributor should then provide service to the customer/s, and Fenix will support backup for this service.

The free warranty does not cover any damages or failure caused by:

- (1) Normal wear
- (2) Rough operation
- (3) Battery leakage
- (4) Any defects or damages caused by the improper operations include but not limited to the operation which doesn't comply with the warranty or notes shown in the product specification. For example, the product specification will describe that please don't disassemble the sealed head, as doing so can damage the flashlight and will void the warranty.
- (5) Any defects or damage led by other behaviors which can not be controlled by Fenix reasonably.

For any problems/suggestions, please email our Customer Service Department:

service@fenixlight.com (Europe/America regions)
service_1@fenixlight.com (Asia/Oceania/Africa regions)
Tel: +86 400 8866 093 /+86 755 2963 1193

PHOTOS TAKEN

Cover: ispyfriend
Illustration: Adrian
Alessandro-Farese
Azhari
Brendon Wainwright
Br_mediacell
Carlos SERRANO
Chechu
Erdi
Ethan
Frontlinetrace
Gareth Owen
IG@wildsoul
IG@Frankadventure
Jack
Kevin Stolzmann
Lee McGrath
Ramon
Seliga
Spencer
Victor
郑用钿
东子爱拍的
我为摄狂
Bas-van-der-horst
Anatoliy gleb
ispyfriend

CONTACT US



Facebook



Instagram



YouTube